


HOME REPORT

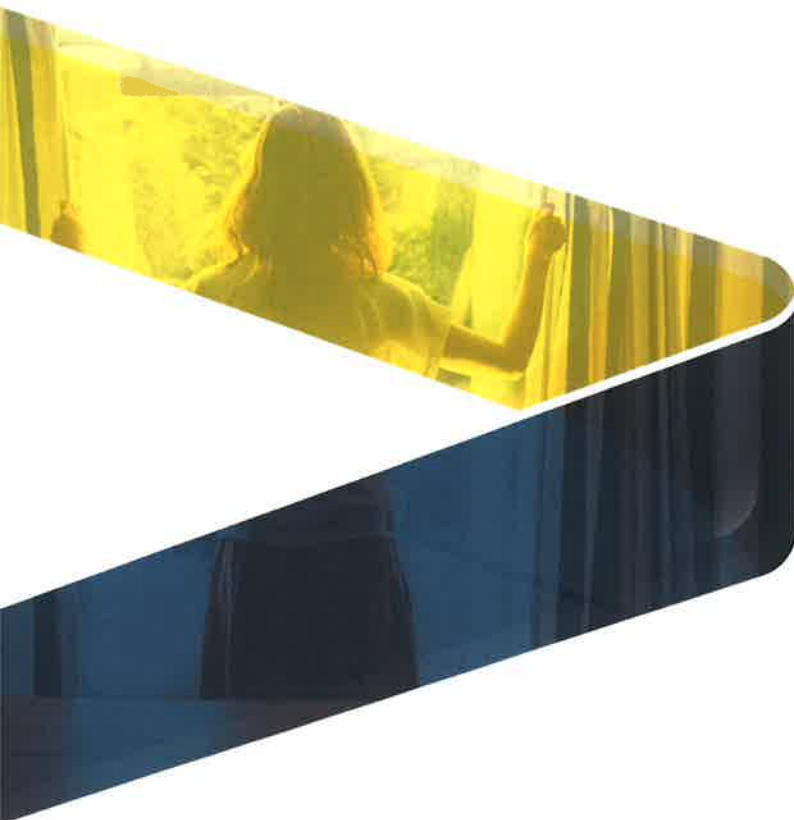

DM HALL
CHARTERED SURVEYORS

Home Report

Property: **3/1**
 80 Calder Street
 Glasgow
 Lanarkshire
 G42 7RX


Prepared for: **Jennifer Thomson**

Prepared by: **Steven W Graham, BSc MRICS**

Report reference: **801648-1-2**

Date of Report: **28/11/2019**

ENERGY PERFORMANCE CERTIFICATE

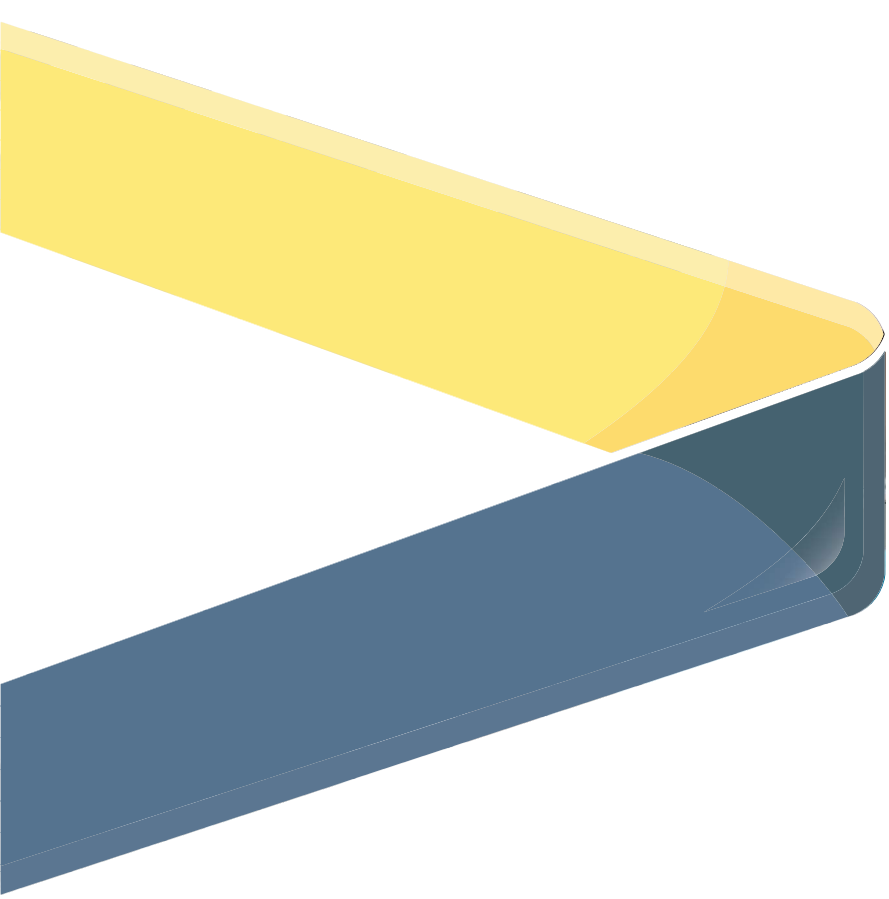

DM HALL
CHARTERED SURVEYORS

Energy Performance Certificate (EPC)

Scotland

Dwellings

FLAT 3/1 , 80 CALDER STREET, GLASGOW, G42 7RX

Dwelling type: Top-floor flat
Date of assessment: 21 August 2019
Date of certificate: 22 August 2019
Total floor area: 63 m²
Primary Energy Indicator: 431 kWh/m²/year

Reference number: 2393-1008-0208-8531-8900
Type of assessment: RdSAP, existing dwelling
Approved Organisation: Elmhurst
Main heating and fuel: Boiler and radiators, mains gas


You can use this document to:

- Compare current ratings of properties to see which are more energy efficient and environmentally friendly
- Find out how to save energy and money and also reduce CO₂ emissions by improving your home

Estimated energy costs for your home for 3 years*	£3,021	See your recommendations report for more information
Over 3 years you could save*	£951	

* based upon the cost of energy for heating, hot water, lighting and ventilation, calculated using standard assumptions

Very energy efficient - lower running costs

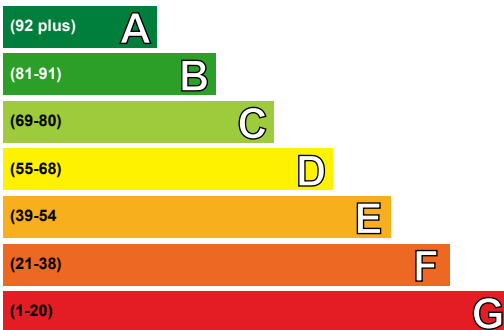

Not energy efficient - higher running costs

Current	Potential
51	66


Energy Efficiency Rating

This graph shows the current efficiency of your home, taking into account both energy efficiency and fuel costs. The higher this rating, the lower your fuel bills are likely to be.

Your current rating is **band E (51)**. The average rating for EPCs in Scotland is **band D (61)**.

The potential rating shows the effect of undertaking all of the improvement measures listed within your recommendations report.

Very environmentally friendly - lower CO₂ emissions

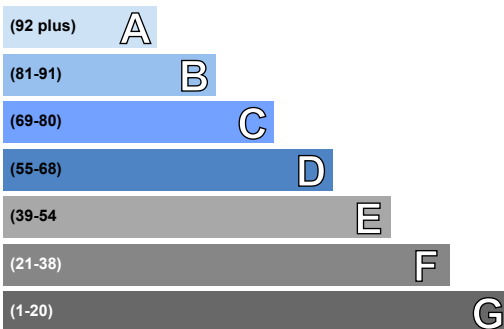

Not environmentally friendly - higher CO₂ emissions

Current	Potential
44	62

Environmental Impact (CO₂) Rating

This graph shows the effect of your home on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating, the less impact it has on the environment.

Your current rating is **band E (44)**. The average rating for EPCs in Scotland is **band D (59)**.

The potential rating shows the effect of undertaking all of the improvement measures listed within your recommendations report.

Top actions you can take to save money and make your home more efficient

Recommended measures	Indicative cost	Typical savings over 3 years
1 Internal or external wall insulation	£4,000 - £14,000	£573.00
2 Heating controls (room thermostat)	£350 - £450	£120.00
3 Condensing boiler	£2,200 - £3,000	£189.00

A full list of recommended improvement measures for your home, together with more information on potential cost and savings and advice to help you carry out improvements can be found in your recommendations report.

To find out more about the recommended measures and other actions you could take today to stop wasting energy and money, visit greenerscotland.org or contact Home Energy Scotland on 0808 808 2282.

THIS PAGE IS THE ENERGY PERFORMANCE CERTIFICATE WHICH MUST BE AFFIXED TO THE DWELLING AND NOT BE REMOVED UNLESS IT IS REPLACED WITH AN UPDATED CERTIFICATE

Summary of the energy performance related features of this home

This table sets out the results of the survey which lists the current energy-related features of this home. Each element is assessed by the national calculation methodology; 1 star = very poor (least efficient), 2 stars = poor, 3 stars = average, 4 stars = good and 5 stars = very good (most efficient). The assessment does not take into consideration the condition of an element and how well it is working. 'Assumed' means that the insulation could not be inspected and an assumption has been made in the methodology, based on age and type of construction.

Element	Description	Energy Efficiency	Environmental
Walls	Sandstone or limestone, as built, no insulation (assumed)	★★☆☆☆	★★☆☆☆
	Solid brick, as built, no insulation (assumed)	★★☆☆☆	★★☆☆☆
Roof	Pitched, no insulation (assumed)	★☆☆☆☆	★☆☆☆☆
Floor	(another dwelling below)	—	—
Windows	Fully double glazed	★★★★☆☆	★★★★☆☆
Main heating	Boiler and radiators, mains gas	★★★★★☆☆	★★★★★☆☆
Main heating controls	Programmer, TRVs and bypass	★★★★☆☆☆	★★★★☆☆☆
Secondary heating	None	—	—
Hot water	From main system	★★★★★☆☆	★★★★★☆☆
Lighting	Low energy lighting in 86% of fixed outlets	★★★★★★★	★★★★★★★

The energy efficiency rating of your home

Your Energy Efficiency Rating is calculated using the standard UK methodology, RdSAP. This calculates energy used for heating, hot water, lighting and ventilation and then applies fuel costs to that energy use to give an overall rating for your home. The rating is given on a scale of 1 to 100. Other than the cost of fuel for electrical appliances and for cooking, a building with a rating of 100 would cost almost nothing to run.

As we all use our homes in different ways, the energy rating is calculated using standard occupancy assumptions which may be different from the way you use it. The rating also uses national weather information to allow comparison between buildings in different parts of Scotland. However, to make information more relevant to your home, local weather data is used to calculate your energy use, CO₂ emissions, running costs and the savings possible from making improvements.

The impact of your home on the environment

One of the biggest contributors to global warming is carbon dioxide. The energy we use for heating, lighting and power in our homes produces over a quarter of the UK's carbon dioxide emissions. Different fuels produce different amounts of carbon dioxide for every kilowatt hour (kWh) of energy used. The Environmental Impact Rating of your home is calculated by applying these 'carbon factors' for the fuels you use to your overall energy use.

The calculated emissions for your home are 76 kg CO₂/m²/yr.

The average Scottish household produces about 6 tonnes of carbon dioxide every year. Based on this assessment, heating and lighting this home currently produces approximately 4.8 tonnes of carbon dioxide every year. Adopting recommendations in this report can reduce emissions and protect the environment. If you were to install all of these recommendations this could reduce emissions by 1.7 tonnes per year. You could reduce emissions even more by switching to renewable energy sources.


Estimated energy costs for this home

	Current energy costs	Potential energy costs	Potential future savings
Heating	£2,550 over 3 years	£1,701 over 3 years	
Hot water	£294 over 3 years	£192 over 3 years	
Lighting	£177 over 3 years	£177 over 3 years	
Totals	£3,021	£2,070	

These figures show how much the average household would spend in this property for heating, lighting and hot water. This excludes energy use for running appliances such as TVs, computers and cookers, and the benefits of any electricity generated by this home (for example, from photovoltaic panels). The potential savings in energy costs show the effect of undertaking all of the recommended measures listed below.

Recommendations for improvement

The measures below will improve the energy and environmental performance of this dwelling. The performance ratings after improvements listed below are cumulative; that is, they assume the improvements have been installed in the order that they appear in the table. Further information about the recommended measures and other simple actions to take today to save money is available from the Home Energy Scotland hotline which can be contacted on 0808 808 2282. Before carrying out work, make sure that the appropriate permissions are obtained, where necessary. This may include permission from a landlord (if you are a tenant) or the need to get a Building Warrant for certain types of work.

Recommended measures	Indicative cost	Typical saving per year	Rating after improvement	
			Energy	Environment
1 Internal or external wall insulation	£4,000 - £14,000	£191		
2 Upgrade heating controls	£350 - £450	£40		
3 Replace boiler with new condensing boiler	£2,200 - £3,000	£63		
4 Flue gas heat recovery device in conjunction with boiler	£400 - £900	£24		

Alternative measures

There are alternative improvement measures which you could also consider for your home. It would be advisable to seek further advice and illustration of the benefits and costs of such measures.

- Micro CHP

Choosing the right improvement package

For free and impartial advice on choosing suitable measures for your property, contact the Home Energy Scotland hotline on 0808 808 2282 or go to www.greenerscotland.org.

About the recommended measures to improve your home's performance rating

This section offers additional information and advice on the recommended improvement measures for your home

1 Internal or external wall insulation

Internal or external wall insulation involves adding a layer of insulation to either the inside or the outside surface of the external walls, which reduces heat loss and lowers fuel bills. As it is more expensive than cavity wall insulation it is only recommended for walls without a cavity, or where for technical reasons a cavity cannot be filled. Internal insulation, known as dry-lining, is where a layer of insulation is fixed to the inside surface of external walls; this type of insulation is best applied when rooms require redecorating. External solid wall insulation is the application of an insulant and a weather-protective finish to the outside of the wall. This may improve the look of the home, particularly where existing brickwork or rendering is poor, and will provide long-lasting weather protection. Further information can be obtained from the National Insulation Association (www.nationalinsulationassociation.org.uk). It should be noted that a building warrant is required for the installation of external wall insulation. Planning permission may also be required and that building regulations apply to external insulation so it is best to check with your local authority on both issues.

2 Heating controls (room thermostat)

The heating system should have a room thermostat to enable the boiler to switch off when no heat is required. A competent heating engineer should be asked to do this work. Insist that the thermostat switches off the boiler as well as the pump and that the thermostatic radiator valve is removed from any radiator in the same room as the thermostat. Building regulations generally apply to this work and a building warrant may be required, so it is best to check with your local authority building standards department and seek advice from a qualified heating engineer.

3 Condensing boiler

A condensing boiler is capable of much higher efficiencies than other types of boiler, meaning it will burn less fuel to heat this property. This improvement is most appropriate when the existing central heating boiler needs repair or replacement, however there may be exceptional circumstances making this impractical. Condensing boilers need a drain for the condensate which limits their location; remember this when considering remodelling the room containing the existing boiler even if the latter is to be retained for the time being (for example a kitchen makeover). Building regulations generally apply to this work and a building warrant may be required, so it is best to check with your local authority building standards department and seek advice from a qualified heating engineer.

4 Flue gas heat recovery

A flue gas heat recovery system extracts heat from the boiler flue gases and transfers it to the incoming cold water so that the boiler needs to supply less heat. It is suitable for use only with modern condensing gas boiler and should be fitted when a replacement boiler is installed. You should seek advice from a qualified heating engineer.

Low and zero carbon energy sources

Low and zero carbon (LZC) energy sources are sources of energy that release either very little or no carbon dioxide into the atmosphere when they are used. Installing these sources may help reduce energy bills as well as cutting carbon.

LZC energy sources present: There are none provided for this home

Your home's heat demand

You could receive Renewable Heat Incentive (RHI) payments and help reduce carbon emissions by replacing your existing heating system with one that generates renewable heat and, where appropriate, having your loft insulated and cavity walls filled. The estimated energy required for space and water heating will form the basis of the payments. For more information go to www.energysavingtrust.org.uk/scotland/rhi.

Heat demand	Existing dwelling	Impact of loft insulation	Impact of cavity wall insulation	Impact of solid wall insulation
Space heating (kWh per year)	13,954	(5,595)	N/A	(4,357)
Water heating (kWh per year)	1,908			

Addendum

This dwelling has stone walls and so requires further investigation to establish whether these walls are of cavity construction and to determine which type of wall insulation is best suited.

About this document

This Recommendations Report and the accompanying Energy Performance Certificate are valid for a maximum of ten years. These documents cease to be valid where superseded by a more recent assessment of the same building carried out by a member of an Approved Organisation.

The Energy Performance Certificate and this Recommendations Report for this building were produced following an energy assessment undertaken by an assessor accredited by Elmhurst (www.elmhurstenergy.co.uk), an Approved Organisation Appointed by Scottish Ministers. The certificate has been produced under the Energy Performance of Buildings (Scotland) Regulations 2008 from data lodged to the Scottish EPC register. You can verify the validity of this document by visiting www.scottishepcregister.org.uk and entering the report reference number (RRN) printed at the top of this page.

Assessor's name:	Mr. Paul Reilly
Assessor membership number:	EES/009388
Company name/trading name:	D M Hall Chartered Surveyors LLP
Address:	151/153 Kilmarnock Road Glasgow Shawlands G41 3JE
Phone number:	0141 636 4141
Email address:	enquiries@dmhall.co.uk
Related party disclosure:	No related party

If you have any concerns regarding the content of this report or the service provided by your assessor you should in the first instance raise these matters with your assessor and with the Approved Organisation to which they belong. All Approved Organisations are required to publish their complaints and disciplinary procedures and details can be found online at the web address given above.

Use of this energy performance information

Once lodged by your EPC assessor, this Energy Performance Certificate and Recommendations Report are available to view online at www.scottishepcregister.org.uk, with the facility to search for any single record by entering the property address. This gives everyone access to any current, valid EPC except where a property has a Green Deal Plan, in which case the report reference number (RRN) must first be provided. The energy performance data in these documents, together with other building information gathered during the assessment is held on the Scottish EPC Register and is available to authorised recipients, including organisations delivering energy efficiency and carbon reduction initiatives on behalf of the Scottish and UK governments. A range of data from all assessments undertaken in Scotland is also published periodically by the Scottish Government. Further information on these matters and on Energy Performance Certificates in general, can be found at www.gov.scot/epc.

Advice and support to improve this property


There is support available, which could help you carry out some of the improvements recommended for this property on page 3 and stop wasting energy and money. For more information, visit greenerScotland.org or contact Home Energy Scotland on 0808 808 2282.

Home Energy Scotland's independent and expert advisors can offer free and impartial advice on all aspects of energy efficiency, renewable energy and more.

HOMEENERGYSCOTLAND.ORG
0808 808 2282
FUNDED BY THE SCOTTISH GOVERNMENT



SINGLE SURVEY

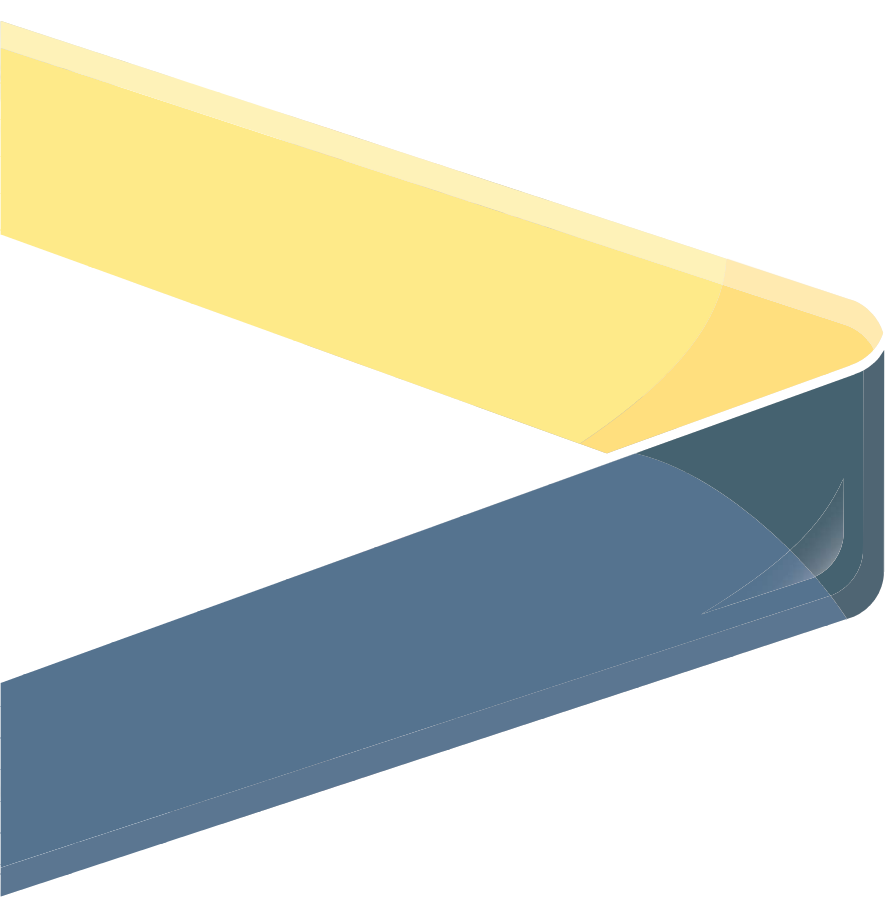

DM HALL
CHARTERED SURVEYORS

Schedule 1

Survey Report

3/1

80 Calder Street

Glasgow

Lanarkshire

G42 7RX

Customer

Jennifer Thomson

Date of Inspection

28/11/2019

Prepared by

Steven W Graham, BSc MRICS

1. INFORMATION AND SCOPE OF INSPECTION

This section tells you about the type, accommodation, neighbourhood, age and construction of the property. It also tells you about the extent of the inspection and highlights anything that the surveyor could not inspect.

All references to visual inspection refer to an inspection from within the property without moving any obstructions and externally from ground level within the site and adjoining public areas. Any references to left or right in a description of the exterior of the property refer to the view of someone standing facing that part of the property from the outside.

The inspection is carried out without causing damage to the building or its contents and without endangering the occupiers or the surveyor. Heavy furniture, stored items and insulation are not moved. Unless identified in the report the surveyor will assume that no harmful or hazardous materials or techniques have been used in the construction. The presence or possible consequences of any site contamination will not be researched.

Services such as TV/cable connection, internet connection, swimming pools and other leisure facilities etc. will not be inspected or reported on.

Description	The subjects comprise a tenement flat occupying a third floor left most position, set within a four storey end terraced corner tenement containing nine residential units on the upper three levels and a range of retail/ commercial premises occupying a ground floor position within the building. Commercial uses range from a Takeaway Outlet, Two Cafes and retail clothing outlets.
Accommodation	The property is accessed by means of a traditional close. THIRD FLOOR : Entrance vestibule, hallway, lounge, two bedrooms, bathroom and centre kitchen.
Gross internal floor area (m^2)	Approximately 63m² or thereby.
Neighbourhood and location	The tenement block occupies a corner position at a junction of Calder Street and Victoria Road located within an established and longstanding area of mixed residential and commercial use, situated within the Govanhill district of Glasgow.
Age	The property is conveniently positioned for local shopping, educational, transport and social facilities. Built circa 1900.
Weather	Partially overcast but dry, following a period of generally mixed weather.
Chimney stacks	Visually inspected with the aid of binoculars where appropriate. Mutual chimney stacks to the block are of a stone/brick construction with pointed or rendered finishes. Where visible flashings are finished in lead work.
Roofing including roof space	Sloping roofs were visually inspected with the aid of binoculars where appropriate. Flat roofs were visually inspected from vantage points within the property and where safe and reasonable to do so from a 3m ladder externally.

	Roof spaces were visually inspected and were entered where there was safe and reasonable access, normally defined as being from a 3m ladder within the property. If this is not possible, then physical access to the roof space may be taken by other means if the Surveyor deems it safe and reasonable to do so. ROOF : The main roof is pitched clad with tiles incorporating tiled ridges and hips. A section of the roof incorporates a glazed sky light which is situated over the common stairwell. Bay window formations to the building have pitched roofs clad in tiles or flat roof details overlaid in lead work. Where visible valley/flashing details are finished in lead work. ROOF SPACE : Access to the common roof void can be obtained from a wall hatch located above the stair head of the close. This hatch was locked and I was unable to gain access.
Rainwater fittings	Visually inspected with the aid of binoculars where appropriate. Rainwater units are of mixed cast iron, PVC and aluminium design.
Main walls	Visually inspected with the aid of binoculars where appropriate. Foundations and concealed parts were not exposed or inspected. The main walls are of a stone construction having a pointed finish. The damp proof course to the building was not visible for inspection.
Windows, external doors and joinery	Internal and external doors were opened and closed where keys were available. Random windows were opened and closed where possible. Doors and windows were not forced open. WINDOWS : uPVC design incorporating sealed unit double glazing.

	EXTERNAL DOOR : The main entrance door is of a timber panel design.
External decorations	Visually inspected. External joinery to the building has a painted/treated finish. Cast iron rainwater units/external plumbing items are paint finished. Low maintenance self coloured uPVC finishes.
Conservatories/Porches	None.
Communal areas	Circulation areas visually inspected. Access to the subject property is by means of a traditional close. External doors to the building are of a timber design incorporating glass panels. The building incorporates a secure entry system. Natural daylight to the close is from timber sash and casement windows incorporating single glazed units or a glazed sky light situated over the common stairwell. Internally, the flooring, stairs and landings are of a solid design with the staircase incorporating metal railings with wooden handrail. Walls and ceilings are generally of a plaster design with paint or tiled finish. Situated off the ground floor common passageway there is a cellar/store. This was locked and I was unable to gain access.
Garages and permanent outbuildings	Visually inspected. Within the residents court yard to the rear there are communal bin compounds. The main walls are of a brick construction.
Outside areas and boundaries	Visually inspected. To the front the tenement block is set off the main public footpath. To the rear there is a residents courtyard. Areas of the courtyard have been laid to lawn and footpaths surfaced

	with mono block or slabs. There are some raised brick planters. Within the court yard area there are a range of planted shrubs and trees.
Ceilings	Visually inspected from floor level. Ceilings would appear to be of a lath and plaster and plasterboard design.
Internal walls	Visually inspected from floor level. Using a moisture meter, walls were randomly tested for dampness where considered appropriate. Internal walls would appear to be of a lath and plaster, plastered on the hard or plasterboard design. There are part tiled wall finishes to the bathroom apartment and tiled splash backs to kitchen work surfaces.
Floors including sub floors	Surfaces of exposed floors were visually inspected. No carpets or floor coverings were lifted. Sub-floor areas were inspected only to the extent visible from a readily accessible and unfixed hatch by way of an inverted "head and shoulders" inspection at the access point. Physical access to the sub floor area may be taken if the Surveyor deems it is safe and reasonable to do so, and subject to a minimum clearance of 1m between the underside of floor joists and the solum as determined from the access hatch. Flooring throughout would appear to be of a suspended timber joist overlaid with a range of fitted floor finishes. SUB FLOOR : Due to the position of the subject property in the building there was no access to sub floors.
Internal joinery and kitchen fittings	Built-in cupboards were looked into but no stored items were moved. Kitchen units were visually inspected excluding appliances. Door facings and skirtings are of a timber design. Internal doors are of a timber panel design or timber frame

	design incorporating glass panels. Kitchen fittings comprise a range of base and wall mounted units incorporating a sink unit and integral appliances.
Chimney breasts and fireplaces	All original fireplaces have been removed and sealed over.
Internal decorations	Visually inspected. Plaster wall and ceiling linings have a paint and/or papered finish. Sections of ceilings have a textured plaster finish.
Cellars	None.
Electricity	Accessible parts of the wiring were visually inspected without removing fittings. No tests whatsoever were carried out to the system or appliances. Visual inspection does not assess any services to make sure they work properly and efficiently and meet modern standards. If any services are turned off, the surveyor will state that in the report and will not turn them on. Mains supply. The electric apparatus is located within the hallway.
Gas	Accessible parts of the system were visually inspected without removing fittings. No tests whatsoever were carried out to the system or appliances. Visual inspection does not assess any services to make sure they work properly and efficiently and meet modern standards. If any services are turned off, the surveyor will state that in the report and will not turn them on. Mains supply. The gas meter is located within the hallway.
Water, plumbing and bathroom fittings	Visual inspection of the accessible pipework, water tanks, cylinders and fittings without removing any insulation. No tests whatsoever were carried out to the system or appliances. Mains water supply. Visible plumbing pipework is run in metal and PVC materials. The bathroom comprises a low level W.C., wash hand basin and panelled bath with electric shower unit over.
Heating and hot water	Accessible parts of the system were visually inspected apart from communal systems, which were not inspected.

	No tests whatsoever were carried out to the system or appliances. There is a "Ferrolì" gas fired located within a wall cupboard in one of the bedroom apartments. This serves steel panelled radiators within the property. This system also provides domestic hot water.
Drainage	Drainage covers etc. were not lifted. Neither drains nor drainage systems were tested. Drainage is assumed to be connected to the mains public sewer.
Fire, smoke and burglar alarms	Visually inspected. No tests whatsoever were carried out to the system or appliances. Any original smoke alarms noted within the property appear to be de-commissioned/removed.
Any additional limits to inspection	For flats / maisonettes Only the subject flat and internal communal areas giving access to the flat were inspected. If the roof space or under-building / basement is communal, reasonable and safe access is not always possible. If no inspection was possible, this will be stated. If no inspection was possible, the surveyor will assume that there are no defects that will have a material effect on the valuation. The building containing the flat, including any external communal areas, was visually inspected only to the extent that the surveyor is able to give an opinion on the general condition and standard of maintenance. The property is occupied, furnished, and floors were covered. I have not disturbed any furniture, personal effects (particularly within wall cupboards) and fitted floor coverings have not been moved. My inspection of internal wall linings was heavily restricted in most apartments due to stored

items. I was unable to inspect a hallway cupboard as the access door was blocked by stored items.

Due to the position of the subject property in the building there was no access to sub floors.

No access could be obtained into the common roof void as the wall hatch was locked.

Situated off the ground floor common passageway within the close there is a cellar/store. This was locked and I was unable to gain access.


Externally, my inspection of the main roof covering to the building and mutual chimney stacks was observed from ground level only. This was restricted in part, due to the height of the building boundary constraints and presence of mature trees obscuring parts of the external building fabric.

The report does not include an asbestos inspection. However asbestos was widely used in the building industry until around 2000, when it became a banned substance. If the possibility of asbestos based products has been reported within the limitations of the inspection and you have concerns you should engage a qualified Asbestos Surveyor.

Parts of this property, which are covered, unexposed or inaccessible, cannot be guaranteed to be free from defect.

I have not carried out an inspection for Japanese Knotweed and unless otherwise stated, for the purpose of this report I have assumed that there is no Japanese Knotweed within the boundaries of the property or within neighbouring properties.

▷ Sectional diagram showing elements of a typical house:

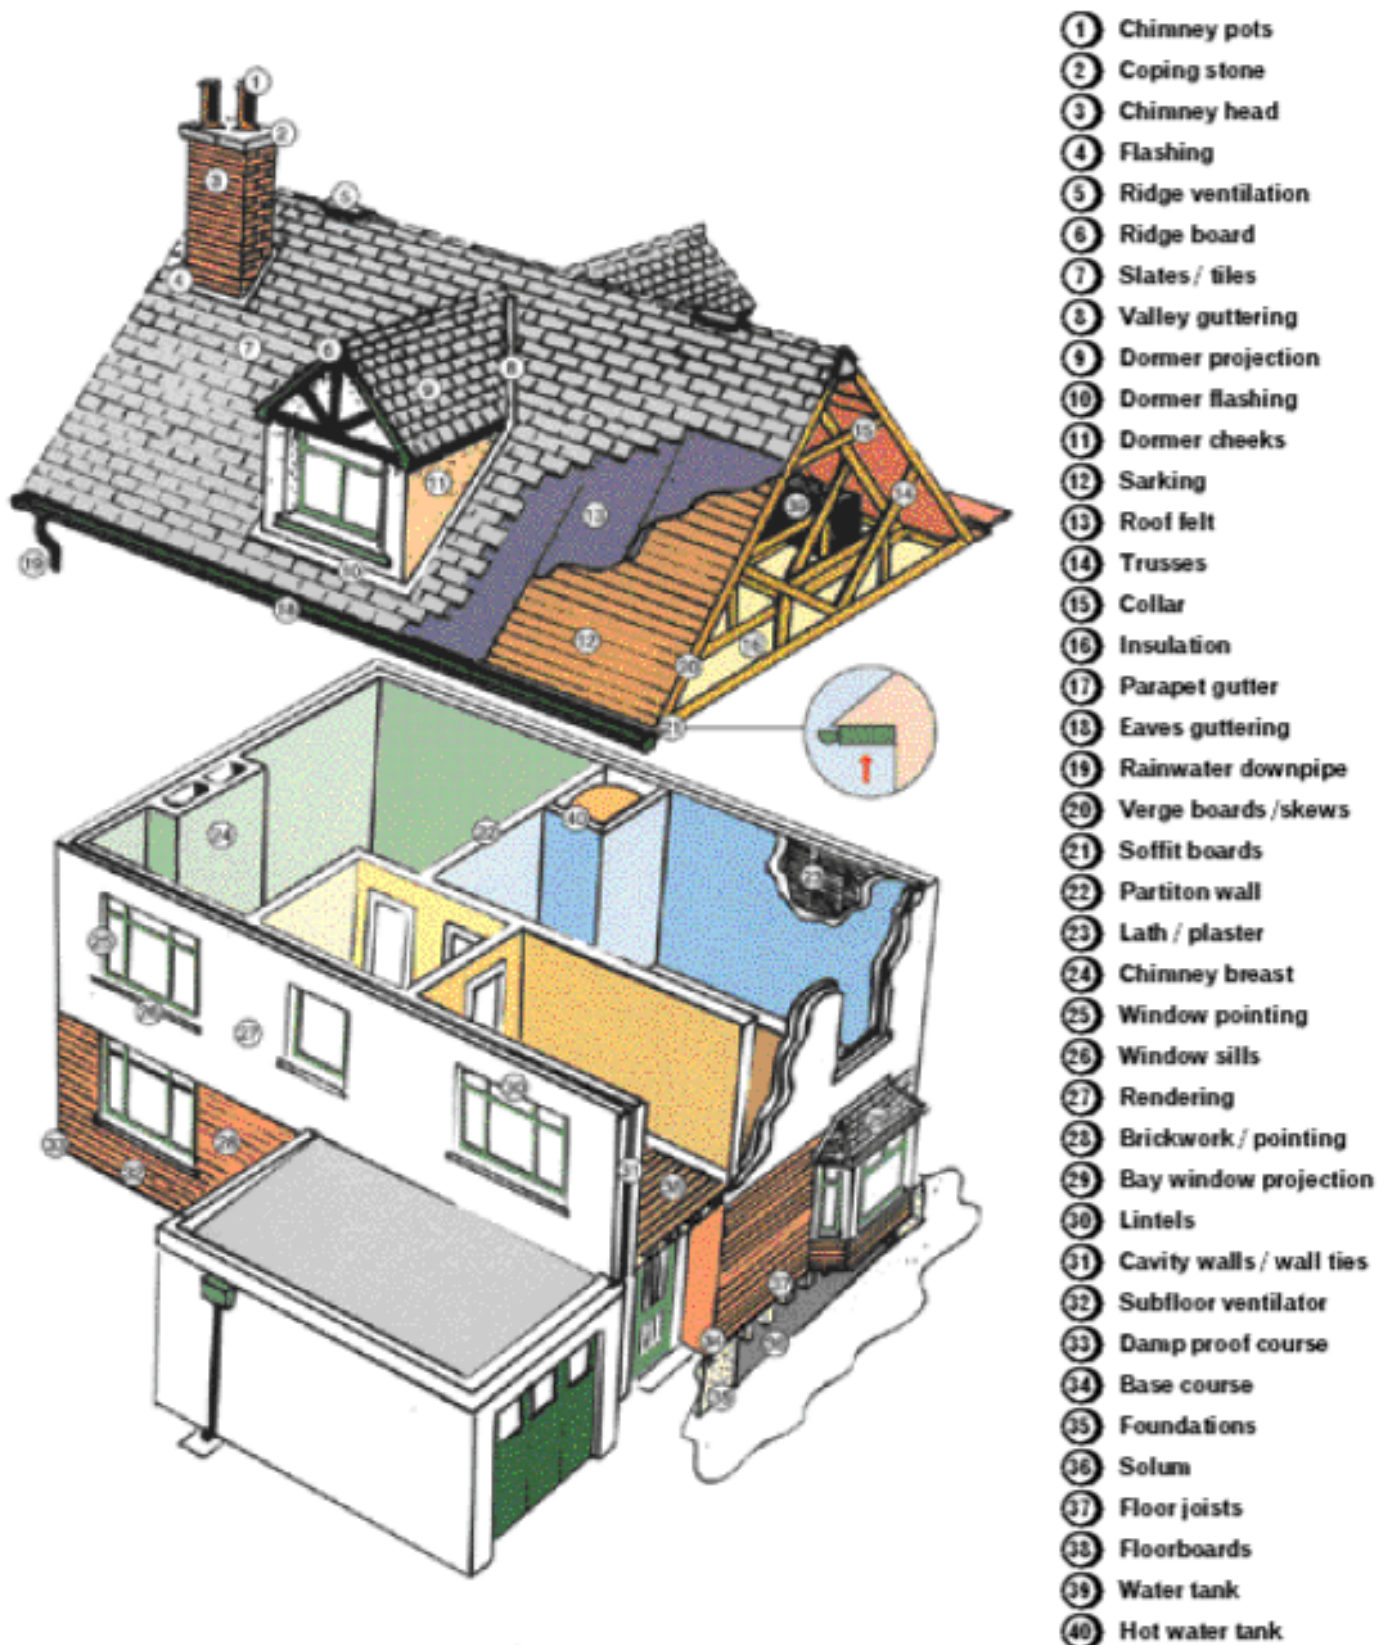

Reference may be made in this report to some or all of the above component parts of the property. This diagram may assist you in locating and understanding these terms.

2. CONDITION

This section identifies problems and tells you about the urgency of any repairs by using one of the following three categories.

Category 3	Category 2	Category 1
Urgent Repairs or replacement are needed now. Failure to deal with them may cause problems to other parts of the property or cause a safety hazard. Estimates for repairs or replacement are needed now.	Repairs or replacement requiring future attention, but estimates are still advised.	No immediate action or repair is needed.

Structural movement



Repair category:	1
Notes	There is evidence of previous movement in the property but within the limitations of my inspection I found no evidence to suggest that the movement appears serious and there are no obvious signs of recent movement having occurred.

Dampness, rot and infestation



Repair category:	2
Notes	Isolated dampness was noted to a ceiling within a bedroom apartment. In addition within the communal close dampness was evident to sections of wall and ceiling linings. Further investigation can be carried out by a firm of Timber/Damp Specialist with a view to having all necessary remedial repairs implemented.

Chimney stacks



Repair category:	3
Notes	Mutual chimney stacks to the building are in generally poor condition. There is weathering/erosion to stonework and brickwork and sections of missing stonework were also noted. There are sections of cracked, defective and missing render. I would recommend that further investigation or the mutual chimney stacks to the building is undertaken. A Contractor will be able to advise on necessary repairs.

Roofing including roof space



Repair category:	2
Notes	ROOF : There is weathering to the tiled roof coverings together with moss accumulation. There is some deterioration to pointing at ridge and hip tiles. There are flat roof details to some of the bay window formations, flat roofs will have a limited life expectancy. Concrete tiles are typically guaranteed for 30 years but have a reasonable life expectancy around 50/60 years according to the BRE. Life expectancy will often depend on weathering and damage from the prevailing weather. A Roofing Contractor will be able to advise on life expectancy and repair/replacement costs.

ROOF SPACE : No access obtained.

Rainwater fittings



Repair category:

1

Notes

Vegetation was noted within gutter. This should be cleared to prevent blockage.

Main walls



Repair category:

2

Notes

There is weathering/erosion to stonework to external walls and selective pointing is loose/weathered.

Windows, external doors and joinery



Repair category:

2

Notes

WINDOWS : uPVC windows are of an older design which do not incorporate trickle vents. Maintenance is required to window units. Adjustment required to window mechanisms. Failed sealed units noted to double glazed windows. There is deterioration to pointing around window units externally.

It is assumed that replacement uPVC windows were installed in accordance with good working practice and complied with Regulations in force at the time of installation.

External decorations



Repair category:

1

Notes

There is some weathering to paint/treated finishes to external joinery and paint finishes to cast iron rainwater units/external plumbing items.

Conservatories/porches



Repair category:

-

Notes

None.

Communal areas



Repair category:

2

Notes



There is plaster cracking to wall and ceiling linings together with deterioration to paint finishes.

There is weathering/decay to timber casement window frames together with deterioration to paint finishes and pointing around window units externally.

There is weathering to external doors.

There are sections of missing railings to the stairs.

See also section regarding "dampness, rot and infestation".

Garages and permanent outbuildings



Repair category:

2

Notes

There is some damage to roof coverings to the residents bin compounds. There is weathering to brickwork to external walls. There is extensive

	ivy/plant growth attached to walls and roofs of the buildings, this can cause damage if not regularly maintained.
--	---

Outside areas and boundaries



Repair category:	2
Notes	There are trees located within close proximity. General advice suggests that no trees should be planted any closer to a building than its mature height and regular maintenance is desirable. There is unevenness to sections of footpaths due to root action damage from trees. Cracking was also noted to some of the raised brick planters.

Ceilings



Repair category:	2
Notes	There is plaster cracking and unevenness to ceiling linings. Sections of ceilings within the property have a textured plaster finish, some older textured plaster finishes may contain asbestos. See information on asbestos in the "limitations of inspection" section above.

Internal walls



Repair category:	2
Notes	There is plaster cracking, damage and unevenness to sections of wall linings.

Floors including sub-floors



Repair category:	1
Notes	No obvious significant defects were identified within the limitations of the inspection. It is not unusual to discover areas of past water spillage when floor coverings are removed in kitchen and bathroom compartments, revealing the need for further repair and maintenance work. SUB FLOOR : No access obtained.

Internal joinery and kitchen fittings



Repair category:	2
Notes	There is wear and tear to internal joinery fixtures and fittings. Internal pass doors equipped with glass panels do not appear to incorporate appropriate safety/ toughened glass. The internal door between the entrance vestibule and hallway has a broken glass panel. Kitchen fittings are dated with wear and tear noted. Some door units require to be re-hung.

Chimney breasts and fireplaces



Repair category:	1
Notes	Original fireplaces have now been removed and sealed over.

Internal decorations



Repair category:	1
Notes	Areas of decoration are marked and shaded.

Cellars



Repair category:	-
Notes	None.

Electricity



Repair category:	1
Notes	No obvious significant defects were identified within the limitations of the inspection. It is recommended that all electrical installation be checked every five years to keep up to date with frequent changes in Safety Regulations. Further advice will be available from a qualified NICEIC registered Contractor.

Gas



Repair category:	1
Notes	No visible defects identified within the limitations of the inspection. It is assumed that all gas appliances have been installed in accordance with good working practice and comply with current Regulations.

Water, plumbing and bathroom fittings



Repair category:	2
Notes	Bathroom fittings are dated with some general wear and tear noted. Seals around the bath unit should be checked to ensure they are water tight.

Heating and hot water



Repair category:	2
Notes	The central heating system has not been tested. I would comment that the central boiler unit is along older lines. Informed opinion suggests that boilers have a life expectancy between ten and twenty years depending on the quality of the boiler and whether or not regular maintenance has been carried out. Future repair or replacement should be anticipated. Further advice on the condition of the central heating installation can be obtained from a Gas Safe Registered Heating Engineer. It is assumed that the central heating system has been installed in accordance with good working practice and complies with current Regulations.

Drainage



Repair category:	1
Notes	No reportable defects were identified within the limitations of the inspection.

Summary:

Set out below is a summary of the condition of the property which is provided for reference only. You should refer to the previous comments for detailed information.

Category 3	Structural Movement	1
Urgent Repairs or replacement are needed now. Failure to deal with them may cause problems to other parts of the property or cause a safety hazard. Estimates for repairs or replacement are needed now.	Dampness, rot and infestation	2
	Chimney stacks	3
	Roofing including roof space	2
	Rainwater fittings	1
Category 2	Main walls	2
Repairs or replacement requiring future attention, but estimates are still advised.	Windows, external doors and joinery	2
	External decorations	1
	Conservatories/porches	-
	Communal areas	2
Category 1	Garages and permanent outbuildings	2
No immediate action or repair is needed.	Outside areas and boundaries	2
	Ceilings	2
	Internal walls	2
	Floors including sub floors	1
	Internal joinery and kitchen fittings	2
	Chimney breasts and fireplaces	1
	Internal decorations	1
	Cellars	-
	Electricity	1
	Gas	1
	Water, plumbing and bathroom fittings	2
	Heating and hot water	2
	Drainage	1

Remember:

The cost of repairs may influence the amount someone is prepared to pay for the property. We recommend that relevant estimates and reports are obtained in your own name.

Warning:

If left unattended, even for a relatively short period, Category 2 repairs can rapidly develop into more serious category 3 repairs. The existence of Category 2 or Category 3 repairs may have an adverse effect on marketability, value and the sale price ultimately achieved for the property. This is particularly true during slow market conditions where the effect can be considerable.

3. ACCESSIBILITY INFORMATION

Guidance notes on Accessibility Information:

Three steps or fewer to a main entrance door of the property:

In flatted developments the 'main entrance' would be the flat's own entrance door, not the external door to the communal stair. The 'three steps or fewer' are counted from external ground level to the flat's entrance door. Where a lift is present, the count is based on the number of steps climbed when using the lift.

Unrestricted parking within 25 metres:

For this purpose, 'unrestricted parking' includes parking available by means of a parking permit. Restricted parking includes; parking that is subject to parking restrictions, as indicated by the presence of solid yellow, red or white lines at the edge of the road or by a parking control sign, parking meters or other coin operated machines.

1	Which floor(s) is the living accommodation on?	Third
2	Are there three steps or fewer to a main entrance door of the property?	No
3	Is there a lift to the main entrance door of the property?	No
4	Are all door openings greater than 750mm?	No
5	Is there a toilet on the same level as the living room and kitchen?	Yes
6	Is there a toilet on the same level as a bedroom?	Yes
7	Are all rooms on the same level with no-internal steps or stairs?	Yes
8	Is there unrestricted parking within 25 metres of an entrance door to the building?	Yes

4. VALUATION AND CONVEYANCER ISSUES

This section highlights information that should be checked with a solicitor or licensed conveyancer. It also gives an opinion of market value and an estimated re-instatement cost for insurance purposes

Matters for a solicitor or licensed conveyancer:

It is assumed that repairs to the external fabric of the building and common areas will be shared on an equitable basis between the co-occupiers of the block. It should be confirmed if there are any proposed or ongoing repair schemes to be completed to the building. Legal Adviser to verify.

I have been advised by the vendor that there is a proposed repair programme to be undertaken to mutual chimney stacks. The exact allocated cost per flat should be confirmed. The vendors representative advised that this cost has been met in relation to the subject flat. This should be legally confirmed.

It should be confirmed if a Factor has been appointed to the building. A Factor can advise on any annual maintenance charges and if there is a block insurance policy in place.

The subject property may be situated within an area of past mining activity. Further advice on historic and future mining activity will be available from the Coal Authority.

The property appears to have been altered to create the current layout of accommodation. This has included the formation of a centre kitchen apartment. The report assumes that all necessary Local Authority and other Consents are in place for all work undertaken and the appropriate documentation including Building Warrants and Completion Certificates issued. If any works did not require Consent then it was been assumed that they meet the standards required by the Building Regulations or are exempt.

It is assumed that replacement uPVC windows have been installed in accordance with good working practice and complied with Regulations in force at the time of installation.

Estimated re-instatement cost for insurance purposes:	£215,000 (Two Hundred and Fifteen Thousand Pounds).
Valuation and market comments:	£80,000 (Eighty Thousand Pounds). This is a replacement report. The original inspection was carried out on 21st of August 2019.

Signed:	Electronically by Steven W Graham, BSc MRICS
Report author:	Steven W Graham, BSc MRICS
Company name	DM Hall - Glasgow
Address:	151 Kilmarnock Road, Glasgow, G41 3JF
Date of report:	29/11/2019

Mortgage Valuation Report

3/1

80 Calder Street

Glasgow

Lanarkshire

G42 7RX

Seller's Name:

Jennifer Thomson

Date of Inspection:

28/11/2019

Prepared by:

Steven W Graham, BSc MRICS

1. Property Details

Property type:	Flat over non-residential use
Floor(s) on which located (<i>Flat or maisonettes only</i>):	
Number of floors in block (<i>Flat or maisonettes only</i>):	
Number of units in block (<i>Flat or maisonettes only</i>):	
Is there a lift provided? (<i>Flat or maisonettes only</i>):	
Property style:	Low rise block
Does the surveyor believe that the property was built for the public sector, e.g. local authority, military, police?	No
Approximate year of construction:	1900

2. Tenure

Tenure:	Absolute Ownership
Ground rent:	
Unexpired years:	

3. Accommodation

Number of living rooms:	One
Number of bedrooms:	Two
Number of kitchens:	One
Number of Bathrooms	One
Number of water closets:	One
Other Rooms:	None
Internal gross floor area (excluding garages and outbuildings):	63m ²
External gross floor area (excluding garages and outbuildings):	76m ²
Does the property have a residential element greater than 40%?	Yes

4. Garage / Parking / Outbuildings

Parking type:	No garage / garage space / parking space
Available on site?	No
Permanent Outbuildings:	Residents brick built bin compound.

5. Construction

Main wall type:	Stone
Other (please specify):	
Roof type:	Tile
Other (please specify):	

6. Special Risks

Has the property suffered structural movement?	Yes
Is this recent or progressive?	No
Is there evidence, history, or reason to anticipate subsidence, heave, landslip or flood in the	No

immediate vicinity?

If yes, please specify any of the above:

7. Service Connections

Based on visual inspection only. If any services appear to be non-mains, please comment on the type and location of the supply in the 'brief description of central heating' section below

Drainage:	Mains
Electricity:	Mains
Central Heating:	Yes
Water:	Mains
Gas:	Mains
Brief description of central heating:	Gas fired boiler to radiators.

8. Site

Apparent legal issues to be verified by the conveyancer

Legal Issue	Verification	Description
Rights of way:		
Shared drives / access:		
Garage or other amenities on separate site:		
Shared service connections:		
Ill-defined boundaries:		
Agricultural land included with property:		
Other:	Yes	

9. Location

Location type:	Mixed residential/commercial
Other (if not specified):	

10. Planning Issues

Has the property been extended / converted / altered?	Yes
Details (if extended, converted, or altered):	The property appears to have been altered to create the current layout of accommodation. This has included the formation of a centre kitchen apartment. The report assumes that all necessary Local Authority and other Consents are in place for all work undertaken and the appropriate documentation including Building Warrants and Completion Certificates issued. If any works did not require Consent then it was been assumed that they meet the standards required by the Building Regulations or are exempt.

11. Roads

Roads that relate to the property:	Made up road
---	--------------

12. General Remarks

General remarks on the property:

The property was occupied, furnished and floors were covered. The inspection of the main roof covering to the building and the mutual chimney stacks was observed from ground level only. This was restricted in part, due to the height of the building and boundary constraints.

The subject property was found to be in generally fair condition however would benefit from a programme of upgrading and refurbishment. The market value reflects that there is wear and tear to items and that maintenance, repair and upgrading will be required.

I have been advised by the vendor that there is a proposed repair programme to be undertaken to mutual chimney stacks. The exact allocated cost per flat should be confirmed. The vendors representative advised that this cost has been met in relation to the subject flat. This should be legally confirmed.

There are trees located within close proximity. General advice suggests that no trees should be planted any closer to a building than its mature height and regular maintenance is desirable.

It is assumed that repairs to the external fabric of the building and common areas will be shared on an equitable basis between the co-occupiers of the block. It should be confirmed if there are any proposed or ongoing repair schemes to be completed to the building. Legal Adviser to verify.

It should be confirmed if a Factor has been appointed to the building. A Factor can advise on any annual maintenance charges and if there is a block insurance policy in place.

The subject property may be situated within an area of past mining activity. Further advice on historic and future mining activity will be available from the Coal Authority.

13. Essential Repairs

Information relating to essential repairs for the property:

Estimated cost of essential repairs:

Retention recommendation?

Amount:

14. Comment on Mortgageability

Information relating to mortgageability of the property:

The subject property is set within a building which also contains retail/commercial premises at ground floor. Lenders have their own individual policies on providing mortgage funding where there is also non domestic or commercial use contained within the same building. Further advice can be obtained from your Financial Adviser.

The subjects will form suitable security for mortgage purposes at the figure of value outlined below subject to individual Lenders criteria.
--

15. Valuations

Market value in present condition:	£80,000.00
------------------------------------	------------

Market value on completion of essential repairs:	
--	--

Insurance reinstatement value (to include the cost of total rebuilding, site clearance, professional fees, ancillary charges plus VAT)	£215,000.00
--	-------------

Is re-inspection necessary?	No
-----------------------------	----

Signed:	Electronically by Steven W Graham, BSc MRICS
---------	--


Report author:	Steven W Graham, BSc MRICS
----------------	----------------------------

Company name:	DM Hall - Glasgow
---------------	-------------------

Address:	151 Kilmarnock Road, Glasgow, G41 3JF
----------	---------------------------------------

Date of report:	29/11/2019
-----------------	------------

PROPERTY QUESTIONNAIRE

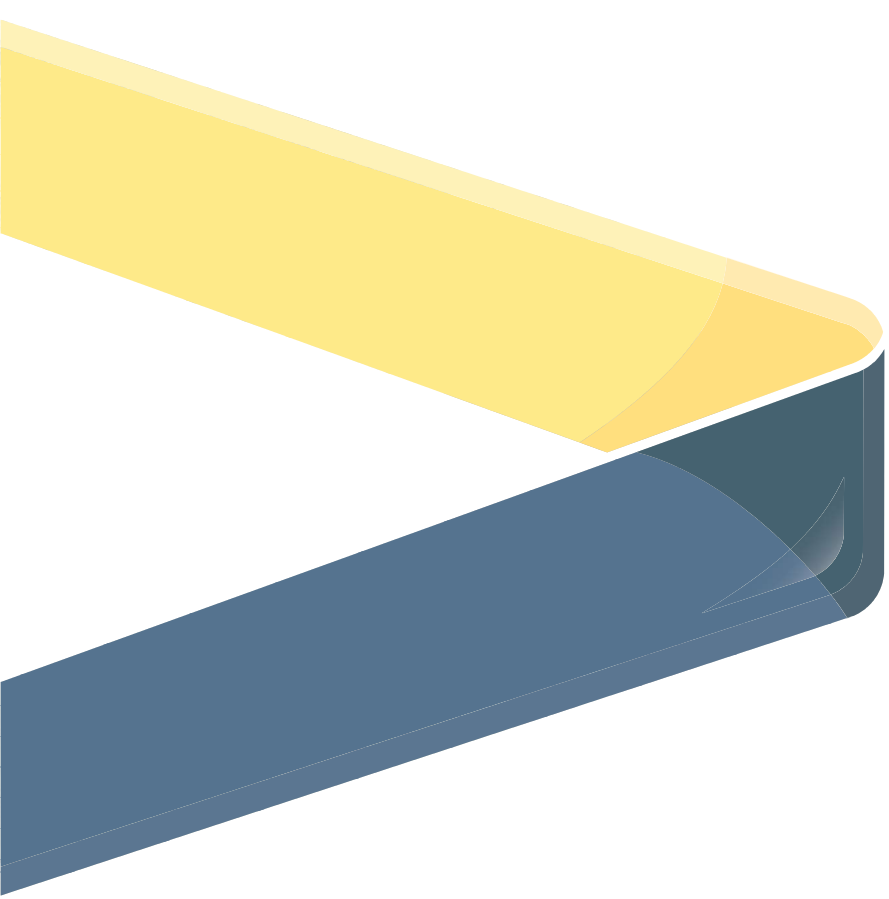

DM HALL
CHARTERED SURVEYORS

Property Questionnaire

3/1

80 Calder Street

Glasgow

Lanarkshire

G42 7RX

Property Address:

3/1
80 Calder Street
Glasgow
Lanarkshire
G42 7RX

Seller(s):

Jennifer Thomson

Completion date of Property Questionnaire:

19/08/2019

Note for sellers

- Please complete this form carefully. It is important that your answers are correct.
- The information in your answers will help ensure that the sale of your house goes smoothly. Please answer each question with as much detailed information as you can.
- If anything changes after you fill in this questionnaire but before the date of entry for the sale of your house, tell your solicitor or estate agent immediately.

Information to be given to prospective buyer(s)

1. Length of ownership

How long have you owned the property?	16 years and 3 months
---------------------------------------	-----------------------

2. Council Tax

Which Council Tax band is your property in?	B
---	---

3. Parking

What are the arrangements for parking at your property?	On street
---	-----------

4. Conservation Area

Is your property in a designated Conservation Area (i.e. an area of special architectural or historic interest, the character or appearance of which it is desirable to preserve or enhance)?	No
---	----

5. Listed Buildings

Is your property a Listed Building, or contained within one (i.e. a building recognised and approved as being of special architectural or historical interest)?	No
---	----

6. Alterations/additions/extensions

a.	Yes
-----------	-----

(i). During your time in the property, have you carried out any structural alterations, additions or extensions (for example, provision of an extra bath/shower room, toilet, or bedroom)?	
--	--

<i>If you have answered yes, please describe the changes which you have made:</i>	Added access from hall to internal kitchen.
---	---

(ii). Did you obtain planning permission, building warrant, completion certificate and other consents for this work?	Yes
--	-----

<i>If you have answered yes, the relevant documents will be needed by the purchaser and you should give them to your solicitor as soon as possible for checking.</i> <i>If you do not have the documents yourself, please note below who has these documents and your solicitor or estate agent will arrange to obtain them.</i>	I have the building warrant.
b. Have you had replacement windows, doors, patio doors or double glazing installed in your property? If you have answered yes, please answer the three questions below:	No
(i). Were the replacements the same shape and type as the ones you replaced?	
(ii). Did this work involve any changes to the window or door openings?	
(iii). Please describe the changes made to the windows, doors, or patio doors (with approximate dates when the work was completed?) Please give any guarantees which you received for this work to your solicitor or estate agent.	
7. Central Heating	
a. Is there a central heating system in your property? Note: A partial central heating system is one which does not heat all the main rooms of the property – the main living room, the bedroom(s), the hall and the bathroom). <i>If you answered yes/partial:</i> What kind of central heating is there? (Examples: gas-fired, solid fuel, electric storage heating, gas, warm air). <i>If you answered yes, please answer the following three questions:</i>	Yes
(i). When was your central heating system or partial central heating system installed?	Gas
(ii). Do you have a maintenance contract for the central heating system? <i>If you have answered yes, please give details of the company with which you have a maintenance agreement:</i>	It was installed when purchased in 2003
(iii). When was your maintenance agreement last renewed? (Please provide the month and year).	No

8. Energy Performance Certificate

Does your property have an Energy Performance Certificate which is less than 10 years old?

No

Note: The surveyor will provide this within his inspection.

9. Issues that may have affected your property

a.

Has there been any storm, flood, fire or other structural damage to your property while you have owned it?

Yes

If you have answered yes, is the damage the subject of any outstanding insurance claim?

No

b.

Are you aware of the existence of asbestos in your property?

No

If you have answered yes, please give details:

10. Services

a.

Please tick which services are connected to your property and give details of the supplier:

Services	Connected	Supplier
Gas/liquid petroleum gas	Yes	
Water mains/private water supply	Yes	
Electricity	Yes	
Mains drainage	Yes	
Telephone	Yes	
Cable TV/Satellite	Yes	
Broadband	Yes	

b.

Is there a septic tank system in the property?

No

If you have answered yes, please answer the two questions below:

(i). Do you have appropriate consents for the discharge from your septic tank?

(ii). Do you have maintenance contract for your septic tank?

If you have answered yes, please give details of the company with which you have a maintenance contract:

11. Responsibilities for Shared or Common Areas

a.

Are you aware of any responsibility to contribute to the cost of anything used jointly, such as the repair of a shared drive, private road, boundary, or garden area?

Yes

If you have answered yes, please give details:

Factor covered shared back court area and stairwell.

b.

Is there a responsibility to contribute to repair and maintenance of the roof, common stairwell or other common areas?

Yes

If you have answered yes, please give details:

Stair cleaning paid through factor.

c.

Has there been any major repair or replacement of any part of the roof during the time you have owned the property?

Yes

d.

Do you have the right to walk over any of your neighbours' property - for example, to put out your rubbish bin or to maintain your boundaries?

Yes

If you have answered yes, please give details:

Shared back court and bin shed.

e.

As far as you are aware, do any of your neighbours have the right to walk over your property, for example to put out their rubbish bin or to maintain their boundaries?

Yes

If you have answered yes, please give details:

As above

f.

As far as you are aware, is there a Public Right of Way across any part of your property? (A Public Right of Way is a way over which the public has a right to pass, whether or not the land is privately-owned).

No

<i>If you have answered yes, please give details:</i>	
12. Charges associated with your property	
a. Is there a factor or property manager for your property?	Yes
<i>If you have answered yes, please provide the name and address and give details of any deposit held and approximate charges:</i>	Hacking and Paterson, 1 Newton place, g3 7pl, approx £100 quarterly, depending on if there have been any repairs carried out.
b. Is there a common buildings insurance policy?	Yes
<i>If you have answered yes, is the cost of the insurance included in your monthly/annual factor's charges?</i>	Yes
c. Please give details of any other charges you have to pay on a regular basis for the upkeep of common areas or repair works, e.g. to a Resident's Association, or maintenance or stair fund.	None
13. Specialist Works	
a. As far as you are aware, has treatment of dry rot, wet rot, damp or any other specialist work ever been carried out to your property?	No
<i>If you have answered yes, please say what the repairs were for, whether they carried out the repairs (and when), or if they were done before you bought the property:</i>	
b. As far as you are aware, has any preventative work for dry rot, wet rot, or damp ever been carried out to your property?	No
<i>If you have answered yes, please give details:</i>	
c. If you have answered yes to 13 (a) or (b), do you have any guarantees relating to this work?	
<i>If you have answered yes, these guarantees will be needed by the purchaser and should be given to your solicitor as soon as possible for checking. If you do not have them yourself, please write below who has these documents and your solicitor or estate agent will arrange for them to be obtained. You will also need to provide a description of the work carried out. This may be</i>	

shown in the original estimate.

Guarantees are held by:

14. Guarantees

a.

Are there any guarantees or warranties for any of the following?

(i). Electrical work

No

(ii). Roofing

No

(iii). Central Heating

No

(iv). NHBC

No

(v). Damp course

No

(vi). Any other work or installations? (For example, cavity wall insulation, underpinning, indemnity policy)

No

b.

If you have answered 'yes' or 'with title deeds', please give details of the work or installations to which the guarantee(s) relate(s):

c.

Are there any outstanding claims under any of the guarantees listed above?

If you have answered yes, please give details

No

15. Boundaries

a.

So far as you are aware, has any boundary of your property been moved in the last 10 years?

No

If you have answered yes, please give details:

16. Notices that affect your property

In the past 3 years, have you ever received a notice;

a.

advising that the owner of a neighbouring property has made a planning application?

No

b.

that affects your property in some other way?

Yes

c.

that requires you to do any maintenance, repairs or improvements to your property?

No

Notice:

If you have answered yes to any of **a.-c.** above, please give the notices to your solicitor or estate agent, including any notices which arrive at any time before the date of entry of the purchase of your property.

SINGLE SURVEY TERMS AND CONDITIONS (WITH MVR)

PART 1 - GENERAL

1.1 THE SURVEYORS

The Seller has engaged the Surveyors to provide the Single Survey Report and a generic Mortgage Valuation Report for Lending Purposes. The Seller has also engaged the Surveyors to provide an Energy Report in the format prescribed by the accredited Energy Company.

The Surveyors are authorised to provide a transcript or retype of the generic Mortgage Valuation Report on to Lender specific pro-forma. Transcript reports are commonly requested by Brokers and Lenders. The transcript report will be in the format required by the Lender but will contain the same information, inspection date and valuation figure as the generic Mortgage Valuation Report and the Single Survey. The Surveyors will decline any transcript request which requires the provision of information additional to the information in the Report and the generic Mortgage Valuation Report until the Seller has conditionally accepted an offer to purchase made in writing.

Once the Seller has conditionally accepted an offer to purchase made in writing, the Purchaser's lender or conveyancer may request that the Surveyors provide general comment on standard appropriate supplementary documentation. In the event of a significant amount of documentation being provided to the Surveyors, an additional fee may be incurred by the Purchaser. Any additional fee will be agreed in writing.

If information is provided to the Surveyors during the conveyancing process which materially affects the valuation stated in the Report and generic Mortgage Valuation Report, the Surveyors reserve the right to reconsider the valuation. Where the Surveyors require to amend the valuation in consequence of such information, they will issue an amended Report and generic Mortgage Valuation Report to the Seller. It is the responsibility of the Seller to ensure that the amended Report and generic Mortgage Valuation Report are transmitted to every prospective Purchaser.

The individual Surveyor will be a member of the Royal Institution of Chartered Surveyors who is competent to survey, value and report upon Residential Property. ¹

If the Surveyors have had a previous business relationship within the past two years with the Seller or Sellers Agent or relative to the property, they will be obliged to indicate this by ticking the adjacent box. ☐

The Surveyors have a written complaints handling procedure. This is available from the offices of the Surveyors at the address stated.

1.2 THE REPORT

The Surveyors will not provide an amended Report on the Property, except to correct factual inaccuracies.

The Report will identify the nature and source of information relied upon in its preparation.

The Surveyor shall provide a Market Value of the Property, unless the condition of the Property is such that it would be inappropriate to do so. A final decision on whether a loan will be granted rests with the Lender who may impose retentions in line with their lending criteria. The date of condition and value of the property will be the date of inspection.

¹ Which shall be in accordance with the current RICS Valuation Standards (the Red Book) and RICS Codes of Conduct

To date, Purchasers have normally obtained their own report from their chosen Surveyor. By contrast, a Single Survey is instructed by the Seller and made available to all potential Purchasers in expectation that the successful Purchaser will have relied upon it. The Royal Institution of Chartered Surveyors rules require disclosure of any potential conflict of interest when acting for the Seller and the Purchaser in the same transaction. The Single Survey may give rise to a conflict of interest and if this is of concern to any party they are advised to seek their own independent advice.

The Report and any expressions or assessments in it are not intended as advice to the Seller or Purchaser or any other person in relation to an asking price or any other sales or marketing decisions.

The Report is based solely on the Property and is not to be relied upon in any manner whatsoever when considering the valuation or condition of any other property.

If certain minor matters are mentioned in the Report it should not be assumed that the Property is free of other minor defects.

Neither the whole nor any part of the Report may be published in any way, reproduced or distributed by any party other than the Seller, prospective purchasers and the Purchaser and their respective professional advisers without the prior written consent of the Surveyors.

1.3 LIABILITY

The Report is prepared with the skill and care reasonably to be expected of a competent residential surveyor who is a member of the Royal Institution of Chartered Surveyors.

The Report is addressed to the Seller and was prepared in the expectation that it (or a complete copy) along with these Terms and Conditions (or a complete copy) would (or, as the case might be, would have been) be disclosed and delivered to

- the Seller;
- any person(s) noting an interest in purchasing the Property from the Seller;
- any person(s) who make(s) (or on whose behalf is made) an offer to purchase the Property, whether or not that offer is accepted by the Seller;
- the Purchaser; and
- the professional advisers of any of these.

The Surveyors acknowledge that their duty of skill and care in relation to the Report is owed to the Seller and to the Purchaser. The Surveyors accept no responsibility or liability whatsoever in relation to the Report to persons other than the Seller and the Purchaser. The Seller and Purchaser should be aware that if a Lender seeks to rely on this Report they do so at their own risk. In particular, the Surveyors accept no responsibility or liability whatsoever to any Lender in relation to the Report. Any such Lender relies upon the Report entirely at their own risk.

1.4 GENERIC MORTGAGE VALUATION REPORT

The Surveyors undertake to the Seller that they will prepare a generic Mortgage Valuation Report, which will be issued along with the Single Survey. It is the responsibility of the Seller to ensure that the generic Mortgage Valuation Report is provided to every potential Purchaser.

1.5 TRANSCRIPT MORTGAGE VALUATION FOR LENDING PURPOSES

The Surveyors undertake that on being asked to do so by a prospective purchaser, or his/her professional advisor or Lender, they will prepare a Transcript Mortgage Valuation Report for Lending Purposes on terms and conditions to be agreed between the Surveyors and Lender and solely for the use of the Lender and upon which the Lender may rely. The decision as to whether finance will be provided is entirely a matter for the Lender. The Transcript Mortgage Valuation Report will be prepared from information contained in the Report and the generic Mortgage Valuation Report.²

1.6 INTELLECTUAL PROPERTY

All intellectual property rights whatsoever (including copyright) in and to the Report, excluding the headings and rubrics, are the exclusive property of the Surveyors and shall remain their exclusive property unless they assign the same to any other party in writing.

1.7 PAYMENT

The Surveyors are entitled to refrain from delivering the Report to anyone until the fee and other charges for it notified to the Seller have been paid.

Additional fees will be charged for subsequent inspections and Reports.

1.8 CANCELLATION

The Seller will be entitled to cancel the inspection by notifying the Surveyor's office at any time before the day of the inspection.

The Surveyor will be entitled not to proceed with the inspection (and will so report promptly to the Seller) if after arriving at the property, the Surveyor concludes that it is of a type of construction of which the surveyor has insufficient specialist knowledge to be able to provide the inspection satisfactorily. The Surveyor will also be entitled not to proceed if after arriving at the property, the surveyor concludes that the property is exempt under Part 3 of The Housing (Scotland) Act 2006 as detailed in the (Prescribed Documents) Regulations 2008. If there is a potential threat to their health or personal safety, the inspection may be postponed or cancelled, at the Surveyor's discretion.

In the case of cancellation or the inspection not proceeding, the Surveyor will refund any fees paid by the Seller for the inspection and Report, except for expenses reasonably incurred and any fee due in light of the final paragraph of this section.

In the case of cancellation by the Seller, for whatever reason, after the inspection has taken place but before a written report is issued, the Surveyor will be entitled to raise an Invoice equivalent to 80% of the agreed fee.

1.9 PRECEDENCE

If there is any incompatibility between these Terms and Conditions and the Report, these Terms and Conditions take precedence.

1.10 DEFINITIONS

- the "Lender" is the party who has provided or intends or proposes to provide financial assistance to the Purchaser towards the purchase of the Property and in whose favour a standard security will be granted over the Property;

² Which shall be in accordance with the current RICS Valuation Standards (the Red Book) and RICS Rules of Conduct.

- the "Transcript Mortgage Valuation Report for Lending Purposes" means a separate report, prepared by the Surveyor, prepared from information in the Report and the generic Mortgage Valuation Report, but in a style and format required by the Lender. The Transcript Mortgage Valuation Report for Lending Purposes will be prepared with the skill and care reasonably to be expected from a surveyor who is a member of the Royal Institution of Chartered Surveyors and who is competent to survey, value and report on the Property;
- the "Generic Mortgage Valuation Report" means a separate report, prepared by the Surveyor from information in the Report but in the Surveyor's own format.
- the "Market Value" is *The estimated amount for which a property should exchange on the date of valuation between a willing buyer and a willing seller in an arm's-length transaction after proper marketing wherein the parties had each acted knowledgeably, prudently and without compulsion*
- the "Property" is the property which forms the subject of the Report;
- the "Purchaser" is the person (or persons) who enters into a contract to buy the Property from the Seller;
- a "prospective Purchaser" is anyone considering buying the Property.
- the "Report" is the report, of the kind described in Part 2 of these Terms and Conditions and in the form set out in part 1 of Schedule 1 of the Housing (Scotland) Act 2006 (Prescribed Documents) Regulations 2008;
- the "Seller" is/are the proprietor(s) of the Property;
- the "Surveyor" is the author of the Report on the Property; and
- the "Surveyors" are the firm or company of which the Surveyor is an employee, director, member or partner (unless the Surveyor is not an employee, director, member or partner, when the "Surveyors" means the Surveyor) whose details are set out at the head of the Report.
- the "Energy Report" is the advice given by the accredited Energy Company, based on information collected by the Surveyor during the Inspection, and also includes an Energy Performance Certificate, in a Government approved format.

PART 2 – DESCRIPTION OF THE REPORT

2.1 THE SERVICE

The Single Survey is a Report by an independent Surveyor, prepared in an objective way regarding the condition and value of the Property on the day of the inspection, and who is a member of the Royal Institution of Chartered Surveyors. It includes an Energy Report as required by Statute and this is in the format of the accredited Energy Company. In addition, the Surveyor has agreed to supply a generic Mortgage Valuation Report.

2.2 THE INSPECTION

The Inspection is a general surface examination of those parts of the Property which are accessible: in other words, *visible and readily available for examination from ground and floor levels, without risk of causing damage to the Property or injury to the Surveyor.*

All references to visual inspection refer to an inspection from within the property at floor level and from ground level within the site and adjoining public areas, without the need to move any obstructions. Any references to left or right are taken facing the front of the property.

The Inspection is carried out with the Seller's permission, without causing damage to the building or contents. Furniture, stored items and insulation are not moved.

Unless identified in the report the Surveyor will assume that no harmful or hazardous materials have been used in the construction. The presence or possible consequences of any site contamination will not be researched.

The Surveyor will not carry out an asbestos inspection, and will not be acting as an asbestos inspector in completing a Single Survey of properties that may fall within the Control of Asbestos in the Workplace Regulations. In the case of flats it will be assumed that there is a duty holder, as defined in the Regulations and that a Register of Asbestos and effective Management Plan is in place, which does not require any expenditure, or pose a significant risk to health. No enquiry of the duty holder will be made.

2.3 THE REPORT

The Report will be prepared by the Surveyor who carried out the property inspection and will describe various aspects of the property as defined by the headings of the Single Survey report with the comments being general and unbiased. The report on the location, style and condition of the property, will be concise and will be restricted to matters that could have a material effect upon value and will omit items that, in the Surveyor's opinion, are not significant. If certain minor matters are mentioned, it should not be interpreted that the property is free of any other minor defects.

Throughout the report, the following repair categories will be used to give an overall opinion of the state of repair and condition of the property.

2.3.1 Category 3: Urgent repairs or replacement are needed now. Failure to deal with them may cause problems to other parts of the property or cause a safety hazard. Estimates for repairs or replacement are needed now.

2.3.2 Category 2: Repairs or replacement requiring future attention, but estimates are still advised.

2.3.3 Category 1: No immediate action or repair is needed.

WARNING: If left unattended, even for a relatively short period, Category 2 repairs can rapidly develop into more serious Category 3 repairs. The existence of Category 2 or Category 3 repairs may have an adverse effect on marketability, value and the sale price ultimately achieved for the property. This is particularly true during slow market conditions when the effect can be considerable.

Parts of the property, which cannot be seen or accessed, will not be reported upon and this will be stated. If the Surveyor suspects that a defect may exist within an unexposed area and which could have a material effect upon the value, he may recommend further investigation by specialist contractors.

2.4 SERVICES

Surveyors are not equipped or qualified to test the services and therefore no comment can be interpreted as implying that the design, installation and function of the services are in accordance/compliance with regulations, safety and efficiency expectations. However, comment is made where there is cause to suspect significant defects or shortcomings with the installations. No tests are made of any services or appliances.

2.5 ACCESSIBILITY

A section is included to help identify the basic information interested parties need to know to decide whether to view a property.

2.6 ENERGY REPORT

A section is included that makes provision for an Energy Report, relative to the property. The Surveyor will collect physical data from the property and provide such data in a format required by an accredited Energy Company. The Surveyor cannot of course accept liability for any advice given by the Energy Company.

2.7 VALUATION AND CONVEYANCER ISSUES

The last section of the Report contains matters considered relevant to the Conveyancer (Solicitor). It also contains the Surveyor's opinion both of the market value of the property and of the re-instatement cost, as defined below.

"Market Value" The estimated amount for which a property should exchange on the date of valuation between a willing buyer and a willing seller in an arm's-length transaction after proper marketing wherein the parties had each acted knowledgeably, prudently and without compulsion. In arriving at the opinion of the Market Value the Surveyor also makes various standard assumptions covering, for example, vacant possession; tenure and other legal considerations; contamination and hazardous materials; the condition of un-inspected parts; the right to use mains services; and the exclusion of curtains, carpets etc. from the valuation. In the case of flats, the following further assumptions are made that:

- There are rights of access and exit over all communal roadways, corridors, stairways etc. and to use communal grounds, parking areas, and other facilities;
- There are no particularly troublesome or unusual legal restrictions;
- There is no current dispute between the occupiers of the flats or any outstanding claims or losses; and the costs of repairs to the building are shared among the co-proprietors on an equitable basis.

Any additional assumption, or any found not to apply, is reported.

"Re-instatement cost" is an estimate for insurance purposes of the current cost of rebuilding the Property in its present form unless otherwise stated. This includes the cost of rebuilding the garage and permanent outbuildings, site clearance and professional fees, but excludes VAT (except on the fees).

Sellers or prospective Purchasers may consider it prudent to instruct a re-inspection and revaluation after a period of 12 weeks (or sooner if appropriate) to reflect changing circumstances in the market and/or in the physical condition of the Property

DM Hall Offices

Aberdeen

01224 594172

Galashiels

01896 752009

Livingston

01506 490404

Ayr

01292 286974

Glasgow (North)

0141 332 8615

Musselburgh

0131 665 6782

Cumbernauld

01236 618900

Glasgow (South)

0141 636 4141

Oban

01631 564225

Cupar

01334 844826

Hamilton

01698 284939

Paisley

0141 887 7700

Dumfries

01387 254318

Inverness

01463 241077

Perth

01738 562100

Dundee

01382 873100

Inverurie

01467 624393

Peterhead

01779 470220

Dunfermline

01383 621262

Irvine

01294 311070

Stirling

01786 475785

Edinburgh

0131 477 6000

Kirkcaldy

01592 598200

Elgin

01343 548501

Falkirk

01324 628321

DMHALL.CO.UK

