

"THE NATIONAL PROPERTY SERVICE"



www.shepherd.co.uk

Home Report

Property: **2 Lauchope Lodge
Well Road
Moffat
Dumfries And Galloway
DG10 9JT**

Prepared for: **Gill Whalley**

Prepared by: **Ian Young MRICS**

Report reference: **858941-1-2**

Date of Report: **19/11/2019**



Energy performance certificate

Energy Performance Certificate (EPC)

Scotland

Dwellings

2 LAUCHOPE LODGE, WELL ROAD, MOFFAT, DG10 9JT

Dwelling type: Ground-floor flat
Date of assessment: 19 November 2019
Date of certificate: 19 November 2019
Total floor area: 82 m²
Primary Energy Indicator: 462 kWh/m²/year


Reference number: 9162-2891-0493-9391-6685
Type of assessment: RdSAP, existing dwelling
Approved Organisation: Elmhurst
Main heating and fuel: Boiler and radiators, mains gas

You can use this document to:

- Compare current ratings of properties to see which are more energy efficient and environmentally friendly
- Find out how to save energy and money and also reduce CO₂ emissions by improving your home

Estimated energy costs for your home for 3 years*	£4,074	See your recommendations report for more information
Over 3 years you could save*	£2,193	

* based upon the cost of energy for heating, hot water, lighting and ventilation, calculated using standard assumptions

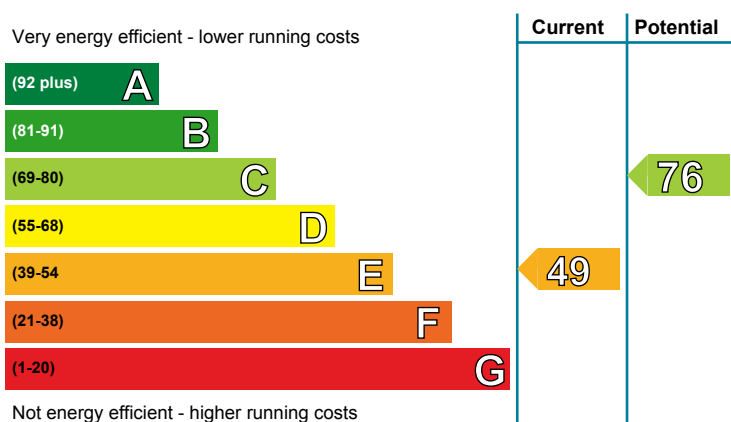


Energy Efficiency Rating

This graph shows the current efficiency of your home, taking into account both energy efficiency and fuel costs. The higher this rating, the lower your fuel bills are likely to be.

Your current rating is **band E (49)**. The average rating for EPCs in Scotland is **band D (61)**.

The potential rating shows the effect of undertaking all of the improvement measures listed within your recommendations report.

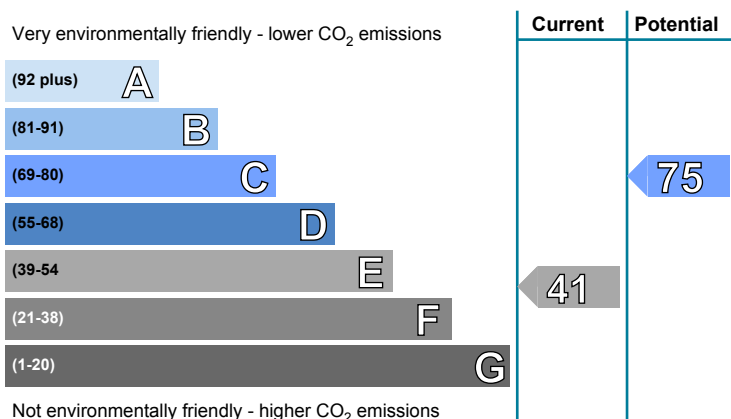

Environmental Impact (CO₂) Rating

This graph shows the effect of your home on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating, the less impact it has on the environment.

Your current rating is **band E (41)**. The average rating for EPCs in Scotland is **band D (59)**.

The potential rating shows the effect of undertaking all of the improvement measures listed within your recommendations report.

Top actions you can take to save money and make your home more efficient

Recommended measures	Indicative cost	Typical savings over 3 years
1 Internal or external wall insulation	£4,000 - £14,000	£1194.00
2 Floor insulation (suspended floor)	£800 - £1,200	£450.00
3 Draughtproofing	£80 - £120	£33.00

A full list of recommended improvement measures for your home, together with more information on potential cost and savings and advice to help you carry out improvements can be found in your recommendations report.

To find out more about the recommended measures and other actions you could take today to stop wasting energy and money, visit greenerscotland.org or contact Home Energy Scotland on 0808 808 2282.

THIS PAGE IS THE ENERGY PERFORMANCE CERTIFICATE WHICH MUST BE AFFIXED TO THE DWELLING AND NOT BE REMOVED UNLESS IT IS REPLACED WITH AN UPDATED CERTIFICATE

Summary of the energy performance related features of this home

This table sets out the results of the survey which lists the current energy-related features of this home. Each element is assessed by the national calculation methodology; 1 star = very poor (least efficient), 2 stars = poor, 3 stars = average, 4 stars = good and 5 stars = very good (most efficient). The assessment does not take into consideration the condition of an element and how well it is working. 'Assumed' means that the insulation could not be inspected and an assumption has been made in the methodology, based on age and type of construction.

Element	Description	Energy Efficiency	Environmental
Walls	Granite or whinstone, as built, no insulation (assumed)	★★☆☆☆	★★☆☆☆
	Granite or whinstone, as built, partial insulation (assumed)	★★★☆☆	★★★☆☆
Roof	(another dwelling above)	—	—
Floor	Suspended, no insulation (assumed)	—	—
Windows	Single glazed	★☆☆☆☆	★☆☆☆☆
Main heating	Boiler and radiators, mains gas	★★★★★	★★★★★
Main heating controls	Programmer, no room thermostat	★☆☆☆☆	★☆☆☆☆
Secondary heating	Room heaters, mains gas	—	—
Hot water	From main system	★★★★★	★★★★★
Lighting	Low energy lighting in all fixed outlets	★★★★★	★★★★★

The energy efficiency rating of your home

Your Energy Efficiency Rating is calculated using the standard UK methodology, RdSAP. This calculates energy used for heating, hot water, lighting and ventilation and then applies fuel costs to that energy use to give an overall rating for your home. The rating is given on a scale of 1 to 100. Other than the cost of fuel for electrical appliances and for cooking, a building with a rating of 100 would cost almost nothing to run.

As we all use our homes in different ways, the energy rating is calculated using standard occupancy assumptions which may be different from the way you use it. The rating also uses national weather information to allow comparison between buildings in different parts of Scotland. However, to make information more relevant to your home, local weather data is used to calculate your energy use, CO₂ emissions, running costs and the savings possible from making improvements.

The impact of your home on the environment

One of the biggest contributors to global warming is carbon dioxide. The energy we use for heating, lighting and power in our homes produces over a quarter of the UK's carbon dioxide emissions. Different fuels produce different amounts of carbon dioxide for every kilowatt hour (kWh) of energy used. The Environmental Impact Rating of your home is calculated by applying these 'carbon factors' for the fuels you use to your overall energy use.

The calculated emissions for your home are 82 kg CO₂/m²/yr.

The average Scottish household produces about 6 tonnes of carbon dioxide every year. Based on this assessment, heating and lighting this home currently produces approximately 6.7 tonnes of carbon dioxide every year. Adopting recommendations in this report can reduce emissions and protect the environment. If you were to install all of these recommendations this could reduce emissions by 4.0 tonnes per year. You could reduce emissions even more by switching to renewable energy sources.

Estimated energy costs for this home

	Current energy costs	Potential energy costs	Potential future savings
Heating	£3,576 over 3 years	£1,377 over 3 years	
Hot water	£306 over 3 years	£306 over 3 years	
Lighting	£192 over 3 years	£198 over 3 years	
Totals	£4,074	£1,881	

These figures show how much the average household would spend in this property for heating, lighting and hot water. This excludes energy use for running appliances such as TVs, computers and cookers, and the benefits of any electricity generated by this home (for example, from photovoltaic panels). The potential savings in energy costs show the effect of undertaking all of the recommended measures listed below.

Recommendations for improvement

The measures below will improve the energy and environmental performance of this dwelling. The performance ratings after improvements listed below are cumulative; that is, they assume the improvements have been installed in the order that they appear in the table. Further information about the recommended measures and other simple actions to take today to save money is available from the Home Energy Scotland hotline which can be contacted on 0808 808 2282. Before carrying out work, make sure that the appropriate permissions are obtained, where necessary. This may include permission from a landlord (if you are a tenant) or the need to get a Building Warrant for certain types of work.

Recommended measures	Indicative cost	Typical saving per year	Rating after improvement	
			Energy	Environment
1 Internal or external wall insulation	£4,000 - £14,000	£398		
2 Floor insulation (suspended floor)	£800 - £1,200	£150		
3 Draughtproofing	£80 - £120	£11		
4 Upgrade heating controls	£350 - £450	£79		
5 Replace single glazed windows with low-E double glazed windows	£3,300 - £6,500	£94		

Choosing the right improvement package

For free and impartial advice on choosing suitable measures for your property, contact the Home Energy Scotland hotline on 0808 808 2282 or go to www.greenerscotland.org.

About the recommended measures to improve your home's performance rating

This section offers additional information and advice on the recommended improvement measures for your home

1 Internal or external wall insulation

Internal or external wall insulation involves adding a layer of insulation to either the inside or the outside surface of the external walls, which reduces heat loss and lowers fuel bills. As it is more expensive than cavity wall insulation it is only recommended for walls without a cavity, or where for technical reasons a cavity cannot be filled. Internal insulation, known as dry-lining, is where a layer of insulation is fixed to the inside surface of external walls; this type of insulation is best applied when rooms require redecorating. External solid wall insulation is the application of an insulant and a weather-protective finish to the outside of the wall. This may improve the look of the home, particularly where existing brickwork or rendering is poor, and will provide long-lasting weather protection. Further information can be obtained from the National Insulation Association (www.nationalinsulationassociation.org.uk). It should be noted that a building warrant is required for the installation of external wall insulation. Planning permission may also be required and that building regulations apply to external insulation so it is best to check with your local authority on both issues.

2 Floor insulation (suspended floor)

Insulation of a floor will significantly reduce heat loss; this will improve levels of comfort, reduce energy use and lower fuel bills. Suspended floors can often be insulated from below but must have adequate ventilation to prevent dampness; seek advice about this if unsure. Further information about floor insulation is available from many sources including www.energysavingtrust.org.uk/scotland/Insulation/Floor-insulation. Building regulations generally apply to this work so it is best to check with your local authority building standards department.

3 Draughtproofing

Fitting draughtproofing, strips of insulation around windows and doors, will improve the comfort in the home. A contractor can be employed but draughtproofing can be installed by a competent DIY enthusiast.

4 Heating controls (room thermostat and thermostatic radiator valves)

A room thermostat will increase the efficiency of the heating system by enabling the boiler to switch off when no heat is required; this will reduce the amount of energy used and lower fuel bills. Thermostatic radiator valves should also be installed, to allow the temperature of each room to be controlled to suit individual needs, adding to comfort and reducing heating bills provided internal doors are kept closed. For example, they can be set to be warmer in the living room and bathroom than in the bedrooms. Ask a competent heating engineer to install thermostatic radiator valves and a fully pumped system with the pump and the boiler turned off by the room thermostat. Thermostatic radiator valves should be fitted to every radiator except for the radiator in the same room as the room thermostat. Remember the room thermostat is needed to enable the boiler to switch off when no heat is required, thermostatic radiator valves on their own do not turn the boiler off. Building regulations generally apply to this work and a building warrant may be required, so it is best to check with your local authority building standards department and seek advice from a qualified heating engineer.

5 Double glazed windows

Double glazing is the term given to a system where two panes of glass are made up into a sealed unit. Replacing existing single-glazed windows with double-glazed windows will improve comfort in the home by reducing draughts and cold spots near windows. Double-glazed windows may also reduce noise, improve security and combat problems with condensation. Building regulations apply to this work and planning permission may also be required, so it is best to check with your local authority on what standards need to be met. A building warrant is not required if the windows comply with the current requirements.

Low and zero carbon energy sources

Low and zero carbon (LZC) energy sources are sources of energy that release either very little or no carbon dioxide into the atmosphere when they are used. Installing these sources may help reduce energy bills as well as cutting carbon.

LZC energy sources present: There are none provided for this home

Your home's heat demand

You could receive Renewable Heat Incentive (RHI) payments and help reduce carbon emissions by replacing your existing heating system with one that generates renewable heat and, where appropriate, having your loft insulated and cavity walls filled. The estimated energy required for space and water heating will form the basis of the payments. For more information go to www.energysavingtrust.org.uk/scotland/rhi.

Heat demand	Existing dwelling	Impact of loft insulation	Impact of cavity wall insulation	Impact of solid wall insulation
Space heating (kWh per year)	17,440	N/A	N/A	(6,500)
Water heating (kWh per year)	2,378			

Addendum

This dwelling has stone walls and may be exposed to wind driven rain and so requires further investigation to establish whether these walls are of cavity construction and to determine which type of wall insulation is best suited.

About this document

This Recommendations Report and the accompanying Energy Performance Certificate are valid for a maximum of ten years. These documents cease to be valid where superseded by a more recent assessment of the same building carried out by a member of an Approved Organisation.

The Energy Performance Certificate and this Recommendations Report for this building were produced following an energy assessment undertaken by an assessor accredited by Elmhurst (www.elmhurstenergy.co.uk), an Approved Organisation Appointed by Scottish Ministers. The certificate has been produced under the Energy Performance of Buildings (Scotland) Regulations 2008 from data lodged to the Scottish EPC register. You can verify the validity of this document by visiting www.scottishepcregister.org.uk and entering the report reference number (RRN) printed at the top of this page.

Assessor's name:	Mr. Ian Young
Assessor membership number:	EES/012603
Company name/trading name:	J & E Shepherd
Address:	13 Albert Square Dundee DD1 1XA
Phone number:	01382 200454
Email address:	dundee@shepherd.co.uk
Related party disclosure:	No related party

If you have any concerns regarding the content of this report or the service provided by your assessor you should in the first instance raise these matters with your assessor and with the Approved Organisation to which they belong. All Approved Organisations are required to publish their complaints and disciplinary procedures and details can be found online at the web address given above.

Use of this energy performance information

Once lodged by your EPC assessor, this Energy Performance Certificate and Recommendations Report are available to view online at www.scottishepcregister.org.uk, with the facility to search for any single record by entering the property address. This gives everyone access to any current, valid EPC except where a property has a Green Deal Plan, in which case the report reference number (RRN) must first be provided. The energy performance data in these documents, together with other building information gathered during the assessment is held on the Scottish EPC Register and is available to authorised recipients, including organisations delivering energy efficiency and carbon reduction initiatives on behalf of the Scottish and UK governments. A range of data from all assessments undertaken in Scotland is also published periodically by the Scottish Government. Further information on these matters and on Energy Performance Certificates in general, can be found at www.gov.scot/epc.

Advice and support to improve this property

There is support available, which could help you carry out some of the improvements recommended for this property on page 3 and stop wasting energy and money. For more information, visit [greener-scotland.org](https://www.greener-scotland.org) or contact Home Energy Scotland on 0808 808 2282.

Home Energy Scotland's independent and expert advisors can offer free and impartial advice on all aspects of energy efficiency, renewable energy and more.

HOMEENERGYSCOTLAND.ORG
0808 808 2282
FUNDED BY THE SCOTTISH GOVERNMENT





Scottish Single Survey

Schedule 1

Survey Report

2 Lauchope Lodge

Well Road

Moffat

Dumfries And Galloway

DG10 9JT

Customer

Gill Whalley

Date of Inspection

19/11/2019

Prepared by

Ian Young MRICS

1. INFORMATION AND SCOPE OF INSPECTION

This section tells you about the type, accommodation, neighbourhood, age and construction of the property. It also tells you about the extent of the inspection and highlights anything that the surveyor could not inspect.

All references to visual inspection refer to an inspection from within the property without moving any obstructions and externally from ground level within the site and adjoining public areas. Any references to left or right in a description of the exterior of the property refer to the view of someone standing facing that part of the property from the outside.

The inspection is carried out without causing damage to the building or its contents and without endangering the occupiers or the surveyor. Heavy furniture, stored items and insulation are not moved. Unless identified in the report the surveyor will assume that no harmful or hazardous materials or techniques have been used in the construction. The presence or possible consequences of any site contamination will not be researched.

Services such as TV/cable connection, internet connection, swimming pools and other leisure facilities etc. will not be inspected or reported on.

Description	The subjects comprise a ground floor self contained flat, forming part of a sub-divided detached Victorian villa containing a total of three residential units. All three flats in the building share a common entrance.
Accommodation	Ground Floor: Lounge, Kitchen/Dining Room, Utility Room, Bedroom 1, Bedroom 2 and Bathroom with w.c.
Gross internal floor area (m^2)	82m ² or thereby.
Neighbourhood and location	The property is situated in an established private residential suburban development, convenient to Moffat town centre amenities.
Age	It is estimated that the property was constructed circa 1855. It is understood that the sub-division of the building into three flats was undertaken in the 1970s.
Weather	Dry and overcast.
Chimney stacks	Two stone pointed chimneys with clay pots vented existing and/or former fireplaces within the subject flat. The other chimneys on the building do not serve the subjects. Visually inspected with the aid of binoculars where appropriate.
Roofing including roof space	The roofs are pitched and slated with a mix of tiled and metal ridging. The subject property is a ground floor flat and, accordingly, no access was gained into the attic roof voids. Sloping roofs were visually inspected with the aid of binoculars where appropriate.
Rainwater fittings	The rainwater fittings are formed in a mix of cast iron and PVC. The main front section of the building has lead-lined parapet gutters at the wallhead. It was not possible to view the lead lined gutters on the basis of a ground level inspection.

	Visually inspected with the aid of binoculars where appropriate.
Main walls	The main walls are of solid stone construction, which are pointed externally. The walls are principally built in whinstone, with sandstone detailing. Visually inspected with the aid of binoculars where appropriate. Foundations and concealed parts were not exposed or inspected.
Windows, external doors and joinery	The windows are single glazed timber sash and case type. Two entrance doors provide access into the subject flat from the common hallway. They are timber panelled type, and one is part glazed. There is a timber and part glazed external door to the kitchen, which is fitted with a cat flap. Internal and external doors were opened and closed where keys were available. Random windows were opened and closed where possible. Doors and windows were not forced open.
External decorations	Visually inspected.
Conservatories/Porches	Not applicable.
Communal areas	The three flats in the building share a common entrance vestibule and hall. The vestibule is accessed through a timber panelled door, which has with semi circular glazed fanlight above. The timber inner door is part glazed. The solid vestibule floor is laid in the original mosaic tiles. The timber floor in the common hallway is carpeted. Circulation areas visually inspected.
Garages and permanent outbuildings	There is a basic quality semi detached single car garage, which is accessed off Haywood Road. It is the left-hand (east-most) garage of the two lockups. The walls are of concrete block and part brick construction. The shallow pitched roof is clad with corrugated metal sheeting. Vehicular access is provided through a metal up and over door, and there is a single glazed window to the side. NOTE: The garage was locked at the time of the survey, and was NOT inspected internally. Visually inspected
Outside areas and boundaries	It is understood there is an exclusive area of garden ground for the subject flat to the south of the building, and that the garden and pathways to the front (east) are shared. Details


	must be confirmed with the title deeds. The common garden to the front sits at a raised level above the public footpath, behind stone pointed retaining walls with hedging planted behind. A timber fence forms the boundary between the exclusive garden ground belonging to the subject property and the neighbouring property to the south. Visually inspected.
Ceilings	The ceilings appear to be lined with a mix of lath and plaster and plasterboard. Visually inspected from floor level.
Internal walls	The main walls are drylined internally. The partitions are a mix of solid construction and timber studs. The walls are part tiled in the bathroom and kitchen. Visually inspected from floor level. Using a moisture meter, walls were randomly tested for dampness where considered appropriate.
Floors including sub floors	The floors appear to be of suspended timber construction throughout, although part of the floor in the kitchen may be concrete. It was not possible to inspect the floor surfaces in some rooms due to the presence of fitted coverings, including floating laminate. No access was gained into the sub floor areas.
Internal joinery and kitchen fittings	The internal doors are timber panelled. There are fitted base and wall units in the kitchen which are on fairly modern lines. Built-in cupboards were looked into but no stored items were moved. Kitchen units were visually inspected excluding appliances.
Chimney breasts and fireplaces	The lounge has a timber and cast iron fireplace with tiled hearth, and has a living flame effect gas fire installed. An original cast iron fireplace remains within the main bedroom, although this is not currently in use. All other fireplaces have been removed and the openings blanked off. Visually inspected. No testing of the flues or fittings was carried out.

Internal decorations	Visually inspected.
Cellars	Not applicable.
Electricity	Mains electricity. The electric meter is in the shared entrance vestibule, and the consumer unit is in the inner hallway. Accessible parts of the wiring were visually inspected without removing fittings. No tests whatsoever were carried out to the system or appliances. Visual inspection does not assess any services to make sure they work properly and efficiently and meet modern standards. If any services are turned off, the surveyor will state that in the report and will not turn them on.
Gas	Mains gas. The gas meter is housed in an external box fixed to the south facing external wall.
Water, plumbing and bathroom fittings	Water is assumed to be from the mains supply. The kitchen units are fitted with a stainless steel sink. The bathroom has a three piece modern white suite. There is a glass shower screen and a mixer shower. Visual inspection of the accessible pipework, water tanks, cylinders and fittings without removing any insulation. No tests whatsoever were carried out to the system or appliances.
Heating and hot water	The wall mounted 'Worcester Greenstar 24i Junior' gas fired boiler is in the utility room. The boiler provides domestic hot water and also heats radiators in the main rooms. The radiators are not fitted with thermostatic valves, and there is no room thermostat. The electronic programmer of the heating is adjacent to the boiler. Accessible parts of the system were visually inspected apart from communal systems, which were not inspected. No tests whatsoever were carried out to the system or appliances.
Drainage	Drainage is assumed to be connected to the public sewer. Drainage covers etc. were not lifted. Neither drains nor drainage systems were tested.

Fire, smoke and burglar alarms	Mains connected smoke detectors have been fitted. In the interests of security no comment is made in relation to the presence or otherwise of a burglar alarm. Visually inspected. No tests whatsoever were carried out to the system or appliances.
Any additional limits to inspection	The property was unoccupied at the time of the survey, although the inspection was restricted by fitted floor coverings in some rooms (including floating laminate). No access was gained into the sub floor areas. Those parts of the property concealed behind fitted units and sanitary fittings etc were not viewed. The external parts of the building were viewed from ground level only, and it was not possible to properly inspect all external elevations or the roof pitches. With properties of this type and age various parts of the structure, such as joists and lintels, are in direct contact with the main external walls, but are hidden from view behind wall linings etc and cannot be seen. The garage was not inspected internally. Those areas which were not inspected cannot be reported as being free from defect, and any comments regarding the condition of the property must be read in this context. An inspection for Japanese Knotweed was not carried out. This is a plant which is subject to control regulation, is considered to be invasive and one which can render a property unsuitable for some mortgage lenders. It is therefore assumed that there is no Japanese Knotweed within the boundaries of the property or its neighbouring property. Identification of Japanese Knotweed is best undertaken by a specialist contractor. For flats / maisonettes Only the subject flat and internal communal areas giving access to the flat were inspected. The building containing the flat, including any external communal areas, was visually inspected only to the extent that the surveyor is able to give an opinion on the general condition and standard of maintenance.

--	--

▷ Sectional diagram showing elements of a typical house:

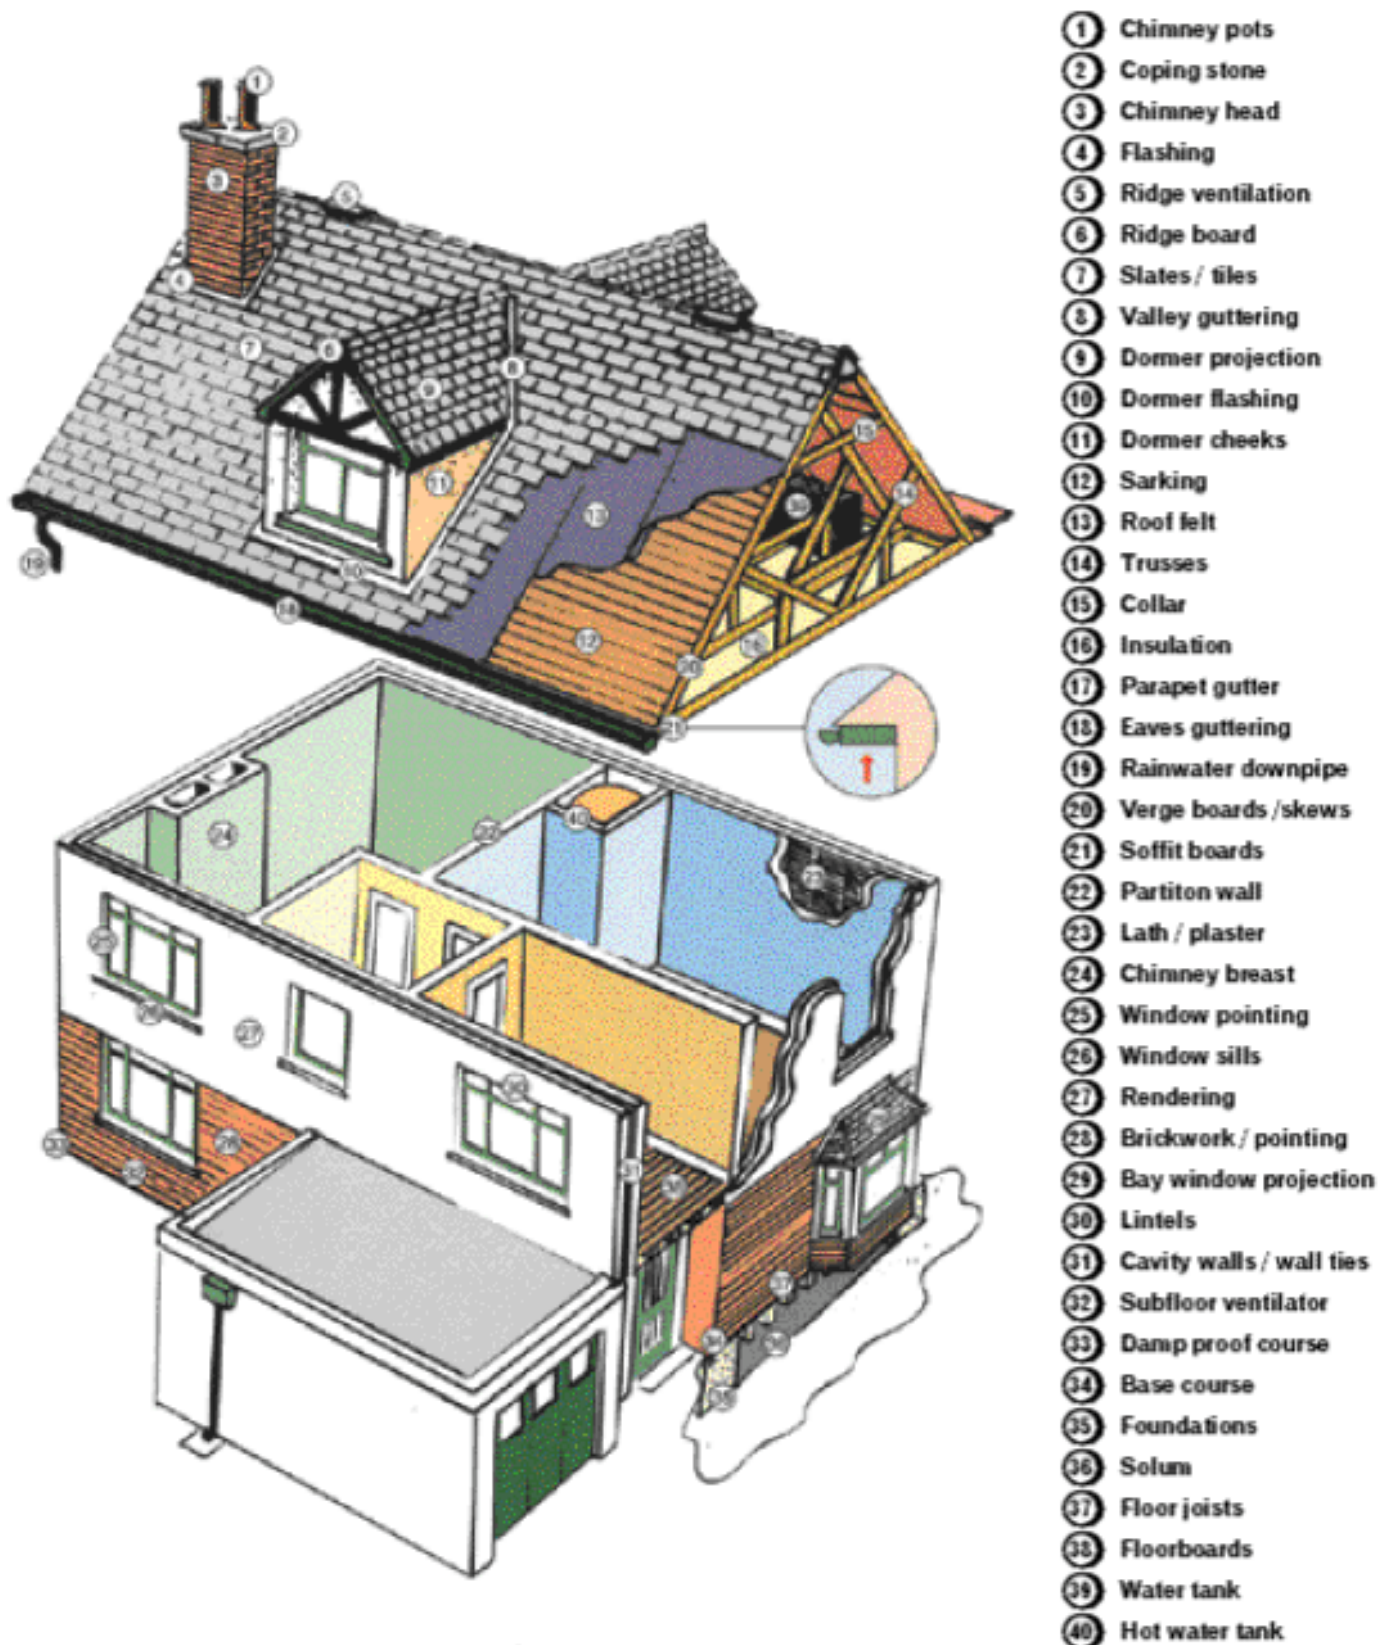

Reference may be made in this report to some or all of the above component parts of the property. This diagram may assist you in locating and understanding these terms.

2. CONDITION

This section identifies problems and tells you about the urgency of any repairs by using one of the following three categories.

Category 3	Category 2	Category 1
Urgent Repairs or replacement are needed now. Failure to deal with them may cause problems to other parts of the property or cause a safety hazard. Estimates for repairs or replacement are needed now.	Repairs or replacement requiring future attention, but estimates are still advised.	No immediate action or repair is needed.

Structural movement



Repair category:	1
Notes	There is no evidence of significant structural movement affecting the property.

Dampness, rot and infestation



Repair category:	2
Notes	There is an issue with damp ingress to the front elevation in the shared entrance vestibule, particularly within the area of the door opening where there is a flat lead covered roof above. Concealed timbers that have been in contact with damp may be affected by rot. This requires investigation by a timber/damp specialist. It is understood that damp proofing works were undertaken in the mid 1980s by Richardson & Starling, and that dry rot repairs were undertaken by the same Company in 2015. It is assumed that valid documentation and specialist guarantees are available.

Chimney stacks



Repair category:	2
Notes	There is weathered and eroded stonework to the chimneys. The flashings are also weathered.

Roofing including roof space



Repair category:	2
Notes	The roof coverings are old, and may be original. There are a number of broken slates, previous patch repairs are evident, and some of the slaterwork is affected by delamination. There is some movement/displacement to the skew stones, and the pointing adjacent to the skews has been patched. The roof metalwork is affected by weathering, and there is corrosion to ridge/ hip fasteners. Following repair, ongoing maintenance of the roof should be anticipated, with a view to future reslating.

Rainwater fittings



Repair category:	2
Notes	The lead lined parapet gutters will require to be regularly inspected and maintained. Defects in this type of gutter are a major cause of damp and rot problems in buildings.

	There is some corrosion to the cast iron rainwater fittings. A downpipe at the side of the flat appears not to be trapped, and discharges rainwater onto adjoining ground which is not an ideal arrangement.
--	--

Main walls



Repair category:	2
Notes	There are open joints and defective pointing to the external walls. Some of the sandstone is cracked and/or damaged.

Windows, external doors and joinery



Repair category:	2
Notes	Some of the windows are sealed shut with paint and do not operate properly. There are missing sash cords to the main bedroom window on the gable end of the building. There is some rot to external joinery timbers, including windowwork and the doors/frames.

External decorations



Repair category:	-
Notes	

Conservatories/porches



Repair category:	-
Notes	

Communal areas



Repair category:	3
Notes	There is evidence of damp ingress to the front wall into the shared entrance vestibule. It would appear that this may relate to leakage of the flat lead covered roof (not viewed) above the entrance door. A downpipe discharges rainwater onto this section of flat roof, which may also be contributing to the problem with water ingress/dampness if the concealed gutter is choked. There is rot to the door and frame to the common entrance.

Garages and permanent outbuildings



Repair category:	2
Notes	Rot is affecting external joinery including the door posts. There is corrosion to the corrugated metal roofing material. The walls require some repointing, and there is some damaged/defective blockwork. the rainwater fittings are poorly aligned, and the gutter is choked. NOTE: The garage was NOT inspected internally.

Outside areas and boundaries



Repair category:	2
Notes	There is movement and defective pointing to the retaining boundary walls. Corrosion and damage was noted to the gates at the entrance to the site.

	Large trees within the garden are likely to require future maintenance.
--	---

Ceilings



Repair category:	1
Notes	Some of the plaster cornices are incomplete. It may have been removed during the course of previous rot repairs. There is some cracking to the ceiling plaster.

Internal walls



Repair category:	2
Notes	Dampness was recorded to the internal wall that separates the kitchen from the main bedroom. The cause of the dampness is unclear, although it may be due to water ingress from defective roof flashings.

Floors including sub-floors



Repair category:	1
Notes	Some sections of floorboard are loose.

Internal joinery and kitchen fittings



Repair category:	1
Notes	No immediate action or repair is needed.

Chimney breasts and fireplaces



Repair category:	1
Notes	It is assumed that the gas fire has been properly installed, updated and maintained to meet with all current regulations and standards with particular regard to fluing and ventilation requirements.

Internal decorations



Repair category:	1
Notes	Works of redecoration may be envisaged by the purchaser(s)

Cellars



Repair category:	-
Notes	Not applicable.

Electricity



Repair category:	1
Notes	The Institute of Electrical Engineers recommends that inspection and testings are undertaken at least every 10 years and on a change of occupancy. It should be appreciated that only the most recently constructed or rewired properties will have installations which fully comply with present IEE Regulations.

Gas



Repair category:	1
Notes	In the interests of safety and in light of recent regulations it would be prudent to have all gas appliances checked by a Gas Safe registered contractor.

Water, plumbing and bathroom fittings



Repair category:	1
Notes	It is assumed that a test of the water supply would not reveal any lead content.

Heating and hot water



Repair category:	1
Notes	It is assumed that the central heating system has been properly installed, updated and maintained to meet with all current regulations and standards with particular regard to fluing and ventilation requirements.

Drainage



Repair category:	1
Notes	All foul and surface water drainage is assumed to be to the main public sewer. The system was not tested.

Summary:

Set out below is a summary of the condition of the property which is provided for reference only. You should refer to the previous comments for detailed information.

Category 3	Structural Movement	1
Urgent Repairs or replacement are needed now. Failure to deal with them may cause problems to other parts of the property or cause a safety hazard. Estimates for repairs or replacement are needed now.	Dampness, rot and infestation	2
	Chimney stacks	2
	Roofing including roof space	2
	Rainwater fittings	2
	Main walls	2
Category 2	Windows, external doors and joinery	2
Repairs or replacement requiring future attention, but estimates are still advised.	External decorations	-
	Conservatories/porches	-
Category 1	Communal areas	3
No immediate action or repair is needed.	Garages and permanent outbuildings	2
	Outside areas and boundaries	2
	Ceilings	1
	Internal walls	2
	Floors including sub floors	1
	Internal joinery and kitchen fittings	1
	Chimney breasts and fireplaces	1
	Internal decorations	1
	Cellars	-
	Electricity	1
	Gas	1
	Water, plumbing and bathroom fittings	1
	Heating and hot water	1
	Drainage	1

Remember:

The cost of repairs may influence the amount someone is prepared to pay for the property. We recommend that relevant estimates and reports are obtained in your own name.

Warning:

If left unattended, even for a relatively short period, Category 2 repairs can rapidly develop into more serious category 3 repairs. The existence of Category 2 or Category 3 repairs may have an adverse effect on marketability, value and the sale price ultimately achieved for the property. This is particularly true during slow market conditions where the effect can be considerable.

3. ACCESSIBILITY INFORMATION

Guidance notes on Accessibility Information:

Three steps or fewer to a main entrance door of the property:

In flatted developments the 'main entrance' would be the flat's own entrance door, not the external door to the communal stair. The 'three steps or fewer' are counted from external ground level to the flat's entrance door. Where a lift is present, the count is based on the number of steps climbed when using the lift.

Unrestricted parking within 25 metres:

For this purpose, 'unrestricted parking' includes parking available by means of a parking permit. Restricted parking includes; parking that is subject to parking restrictions, as indicated by the presence of solid yellow, red or white lines at the edge of the road or by a parking control sign, parking meters or other coin operated machines.

1	Which floor(s) is the living accommodation on?	Ground
2	Are there three steps or fewer to a main entrance door of the property?	Yes
3	Is there a lift to the main entrance door of the property?	No
4	Are all door openings greater than 750mm?	No
5	Is there a toilet on the same level as the living room and kitchen?	Yes
6	Is there a toilet on the same level as a bedroom?	Yes
7	Are all rooms on the same level with no-internal steps or stairs?	Yes
8	Is there unrestricted parking within 25 metres of an entrance door to the building?	Yes

4. VALUATION AND CONVEYANCER ISSUES

This section highlights information that should be checked with a solicitor or licensed conveyancer. It also gives an opinion of market value and an estimated re-instatement cost for insurance purposes

Matters for a solicitor or licensed conveyancer:

1. The assumed tenure is Absolute Ownership.
2. The roads and the footpath adjoining the property are made up, and are adopted by the Local Authority.
3. The subjects form part of a sub-divided detached Victorian villa, which has been split into three flats that have a shared entrance vestibule and hall. It is understood that the sub-division was undertaken in the 1970s. The standard of fire separation and sound insulation between the three dwellings would not meet the requirements of current Building Regulations.
4. The property is a Category C Listed Building, and is situated within a Conservation Area.
5. Details of the liability for common repairs to the building (including the shared internal parts together with the chimneys, roof, rainwater fittings, and external walls etc.) must be confirmed with the title deeds. It is assumed that this will be shared on an equitable basis between the three proprietors in the building.
6. It is understood that there are shared and exclusive areas of garden ground. Details must be confirmed with the title deeds.
7. It is understood that damp proofing works were undertaken in the mid 1980s by Richardson & Starling, and that dry rot repairs were undertaken in the rear part of the building by the same company in 2015. It must confirmed that valid documentation and specialist guarantees are available for this work.

Where defects or repairs have been identified within this report it is recommended that, prior to entering into any legally binding sale or purchase contract, further specialists or contractors advice and estimates should be obtained, to establish the implications, if any, on a potential offer to purchase or the sale price likely to be achieved for the property.

Estimated re-instatement cost for insurance purposes:

For Reinstatement Cost Assessment purposes it is recommended that the subjects be insured for a sum of not less than £340,000.

This figure is the estimate of the cost of rebuilding the premises and bears no direct relationship to current market value.

Valuation and market comments:

Having considered matters, taking into account the foregoing and our observations on site, we are of the opinion that the current Market Value of the subjects, in their present condition and having the benefit of full vacant possession, may be fairly stated in the capital sum of £118,000 (ONE HUNDRED AND EIGHTEEN THOUSAND POUNDS STERLING).

Signed:	Electronically by Ian Young MRICS
Report author:	Ian Young MRICS
Company name	Shepherd Chartered Surveyors (Dumfries)
Address:	18 Castle Street, Dumfries, DG1 1DR
Date of report:	25/11/2019

Mortgage Valuation Report

2 Lauchope Lodge
Well Road
Moffat
Dumfries And Galloway
DG10 9JT

Seller's Name:

Gill Whalley

Date of Inspection:

19/11/2019

Prepared by:

Ian Young MRICS

1. Property Details

Property type:	Converted flat
Floor(s) on which located (<i>Flat or maisonettes only</i>):	Ground
Number of floors in block (<i>Flat or maisonettes only</i>):	2
Number of units in block (<i>Flat or maisonettes only</i>):	3
Is there a lift provided? (<i>Flat or maisonettes only</i>):	No
Property style:	Low rise block
Does the surveyor believe that the property was built for the public sector, e.g. local authority, military, police?	No
Approximate year of construction:	

2. Tenure

Tenure:	Absolute Ownership
Ground rent:	
Unexpired years:	

3. Accommodation

Number of living rooms:	1
Number of bedrooms:	2
Number of kitchens:	1
Number of Bathrooms	1
Number of water closets:	1
Other Rooms:	0
Internal gross floor area (excluding garages and outbuildings):	82m ² m ²
External gross floor area (excluding garages and outbuildings):	97m ² m ²
Does the property have a residential element greater than 40%?	Yes

4. Garage / Parking / Outbuildings

Parking type:	Single garage
Available on site?	Yes
Permanent Outbuildings:	None.

5. Construction

Main wall type:	Stone
Other (please specify):	
Roof type:	Slate
Other (please specify):	

6. Special Risks

Has the property suffered structural movement?	No
Is this recent or progressive?	
Is there evidence, history, or reason to anticipate subsidence, heave, landslip or flood in the	No

immediate vicinity?	
---------------------	--

If yes, please specify any of the above:	
--	--

7. Service Connections

Based on visual inspection only. If any services appear to be non-mains, please comment on the type and location of the supply in the 'brief description of central heating' section below

Drainage:	Mains
Electricity:	Mains
Central Heating:	Yes
Water:	Mains
Gas:	Mains
Brief description of central heating:	Gas fired boiler to radiators (combi).

8. Site

Apparent legal issues to be verified by the conveyancer

Legal Issue	Verification	Description
Rights of way:		
Shared drives / access:	No	
Garage or other amenities on separate site:		
Shared service connections:		
Ill-defined boundaries:	Yes	There are shared and exclusive areas of garden ground.
Agricultural land included with property:		
Other:		

9. Location

Location type:	Residential suburb
Other (if not specified):	

10. Planning Issues

Has the property been extended / converted / altered?	Yes
Details (if extended, converted, or altered):	The property forms part of a sub-divided detached Victorian villa, that was split into three flats in the 1970s. The property is a category C Listed Building, situated in a Conservation Area.

11. Roads

Roads that relate to the property:	Made up road, Adopted
---	-----------------------

12. General Remarks

General remarks on the property:	The subjects form part of a sub-divided detached Victorian
---	--

villa, which has been split into three flats that have a shared entrance vestibule and hall. It is understood that the sub-division was undertaken in the 1970s.

At the time of inspection the property was found to be maintained in reasonable condition having regard to its age and character, with fittings internally on modern lines. A number of items were noted which have been reflected in the valuation figure. In general, these are mostly typical of buildings of this age, or are capable of remedy by routine maintenance and repair.

Repairs are required to the external fabric of the building including the chimneys, roof, rainwater fittings, walls and windows/external joinery.

There are issues with water/damp ingress to the front elevation in the shared entrance vestibule. This may relate to defects in the flat lead covered section of roof with concealed gutter. Repairs must be undertaken to address the problems with water/damp ingress, and exposure works undertaken to ascertain whether any rot repairs are necessary.

Details of the liability for common repairs to the building (including the shared internal parts together with the chimneys, roof, rainwater fittings, and external walls etc.) must be confirmed with the title deeds. It is assumed that this will be shared on an equitable basis between the three proprietors in the building.

It is understood that damp proofing works were undertaken in the mid 1980s by Richardson & Starling, and that dry rot repairs were undertaken in the rear part of the building by the same company in 2015. It must confirmed that valid documentation and specialist guarantees are available for this work

The property is a Category C Listed Building, and is situated within a Conservation Area.

The standard of fire separation and sound insulation between the three dwellings in this converted building would not meet the requirements of current Building Regulations.

It is understood that there are shared and exclusive areas of garden ground. Details must be confirmed with the title deeds.

13. Essential Repairs

Information relating to essential repairs for the property:

Estimated cost of essential repairs:

Retention recommendation?

Amount:

14. Comment on Mortgageability

Information relating to mortgageability of the property:

The property forms suitable security for mortgage purposes, subject to the specific lending criteria of any mortgage provider.

15. Valuations

Market value in present condition: £118,000.00

Market value on completion of essential repairs:

Insurance reinstatement value (to include the cost of total rebuilding, site clearance, professional fees, ancillary charges plus VAT) £340,000.00

Is re-inspection necessary? No

Signed:	Electronically by Ian Young MRICS
Report author:	Ian Young MRICS
Company name:	Shepherd Chartered Surveyors (Dumfries)
Address:	18 Castle Street, Dumfries, DG1 1DR
Date of report:	25/11/2019



Property Questionnaire

Property Questionnaire

2 Lauchope Lodge

Well Road

Moffat

Dumfries And Galloway

DG10 9JT

Property Address:

2 Lauchope Lodge
Well Road
Moffat
Dumfries And Galloway
DG10 9JT

Seller(s):

Gill Whalley

Completion date of Property Questionnaire:

15/11/2019

Note for sellers

- Please complete this form carefully. It is important that your answers are correct.
- The information in your answers will help ensure that the sale of your house goes smoothly. Please answer each question with as much detailed information as you can.
- If anything changes after you fill in this questionnaire but before the date of entry for the sale of your house, tell your solicitor or estate agent immediately.

Information to be given to prospective buyer(s)

1. Length of ownership

How long have you owned the property?	12 years and 3 months
---------------------------------------	-----------------------

2. Council Tax

Which Council Tax band is your property in?	C
---	---

3. Parking

What are the arrangements for parking at your property?	Garage
---	--------

4. Conservation Area

Is your property in a designated Conservation Area (i.e. an area of special architectural or historic interest, the character or appearance of which it is desirable to preserve or enhance)?	Don't Know
---	------------

5. Listed Buildings

Is your property a Listed Building, or contained within one (i.e. a building recognised and approved as being of special architectural or historical interest)?	Yes
---	-----

6. Alterations/additions/extensions

a. (i). During your time in the property, have you carried out any structural alterations, additions or extensions (for example, provision of an extra bath/shower room, toilet, or bedroom)?	No
---	----

<i>If you have answered yes, please describe the changes which you have made:</i>	
---	--

(ii). Did you obtain planning permission, building warrant, completion certificate and other consents for this work?	
--	--

<i>If you have answered yes, the relevant documents will be needed by the purchaser and you should give them to your solicitor as soon as possible for checking.</i>	
<i>If you do not have the documents yourself, please note below who has these documents and your solicitor or estate agent will arrange to obtain them.</i>	
b. Have you had replacement windows, doors, patio doors or double glazing installed in your property? If you have answered yes, please answer the three questions below:	No
(i). Were the replacements the same shape and type as the ones you replaced?	
(ii). Did this work involve any changes to the window or door openings?	
(iii). Please describe the changes made to the windows, doors, or patio doors (with approximate dates when the work was completed?) Please give any guarantees which you received for this work to your solicitor or estate agent.	
7. Central Heating	
a. Is there a central heating system in your property? Note: A partial central heating system is one which does not heat all the main rooms of the property – the main living room, the bedroom(s), the hall and the bathroom). <i>If you answered yes/partial:</i> What kind of central heating is there? (Examples: gas-fired, solid fuel, electric storage heating, gas, warm air). <i>If you answered yes, please answer the following three questions:</i>	Yes
(i). When was your central heating system or partial central heating system installed?	gas
(ii). Do you have a maintenance contract for the central heating system? <i>If you have answered yes, please give details of the company with which you have a maintenance agreement:</i>	2009
(iii). When was your maintenance agreement last renewed? (Please provide the month and year).	No

8. Energy Performance Certificate

Does your property have an Energy Performance Certificate which is less than 10 years old?

Yes

Note: The surveyor will provide this within their inspection.

9. Issues that may have affected your property

a.

Has there been any storm, flood, fire or other structural damage to your property while you have owned it?

No

If you have answered yes, is the damage the subject of any outstanding insurance claim?

b.

Are you aware of the existence of asbestos in your property?

No

If you have answered yes, please give details:

10. Services

a.

Please tick which services are connected to your property and give details of the supplier:

Services	Connected	Supplier
Gas/liquid petroleum gas	Yes	Bulb Energy
Water mains/private water supply	Yes	Scottish Water
Electricity	Yes	Bulb Energy
Mains drainage	Yes	Dumfries & Galloway Council
Telephone	Yes	Not currently under contract
Cable TV/Satellite		
Broadband		

b.

Is there a septic tank system in the property?

No

If you have answered yes, please answer the two questions below:

(i). Do you have appropriate consents for the discharge from your septic tank?

(ii). Do you have maintenance contract for your septic tank? <i>If you have answered yes, please give details of the company with which you have a maintenance contract:</i>	
11. Responsibilities for Shared or Common Areas	
a. Are you aware of any responsibility to contribute to the cost of anything used jointly, such as the repair of a shared drive, private road, boundary, or garden area?	Yes
<i>If you have answered yes, please give details:</i>	Shared responsibility for maintaining communal garden areas, boundaries, drive and hedge to front of house.
b. Is there a responsibility to contribute to repair and maintenance of the roof, common stairwell or other common areas?	Yes
<i>If you have answered yes, please give details:</i>	1/4 share of roof repairs 1/3 of other communal areas eg front door
c. Has there been any major repair or replacement of any part of the roof during the time you have owned the property?	No
d. Do you have the right to walk over any of your neighbours' property - for example, to put out your rubbish bin or to maintain your boundaries?	Yes
<i>If you have answered yes, please give details:</i>	Access to coal shed and rear of property.
e. As far as you are aware, do any of your neighbours have the right to walk over your property, for example to put out their rubbish bin or to maintain their boundaries?	Yes
<i>If you have answered yes, please give details:</i>	Communal path to the side of our property to access upper flat and our flat.
f. As far as you are aware, is there a Public Right of Way across any part of your property? (A Public Right of Way is a way over which the public has a right to pass, whether or not the land is privately-owned).	No

<i>If you have answered yes, please give details:</i>	
12. Charges associated with your property	
a. Is there a factor or property manager for your property?	No
<i>If you have answered yes, please provide the name and address and give details of any deposit held and approximate charges:</i>	
b. Is there a common buildings insurance policy?	No
<i>If you have answered yes, is the cost of the insurance included in your monthly/annual factor's charges?</i>	
c. Please give details of any other charges you have to pay on a regular basis for the upkeep of common areas or repair works, e.g. to a Resident's Association, or maintenance or stair fund.	None
13. Specialist Works	
a. As far as you are aware, has treatment of dry rot, wet rot, damp or any other specialist work ever been carried out to your property?	Yes
<i>If you have answered yes, please say what the repairs were for, whether they carried out the repairs (and when), or if they were done before you bought the property:</i>	Repair to bathroom area due to dry rot. Treated by specialists in 2015 and work guaranteed.
b. As far as you are aware, has any preventative work for dry rot, wet rot, or damp ever been carried out to your property?	No
<i>If you have answered yes, please give details:</i>	
c. If you have answered yes to 13 (a) or (b), do you have any guarantees relating to this work?	Yes
<i>If you have answered yes, these guarantees will be needed by the purchaser and should be given to your solicitor as soon as possible for checking. If you do not have them yourself, please write below who has these documents and your solicitor or estate agent will arrange for them to be obtained. You will also need to provide a description of the work carried out. This may be</i>	Company provided guarantee on completion of work.

shown in the original estimate.

Guarantees are held by:

14. Guarantees

a.

Are there any guarantees or warranties for any of the following?

(i). Electrical work

No

(ii). Roofing

No

(iii). Central Heating

No

(iv). NHBC

No

(v). Damp course

No

(vi). Any other work or installations? (For example, cavity wall insulation, underpinning, indemnity policy)

No

b.

If you have answered 'yes' or 'with title deeds', please give details of the work or installations to which the guarantee(s) relate(s):

c.

Are there any outstanding claims under any of the guarantees listed above?

If you have answered yes, please give details

No

15. Boundaries

a.

So far as you are aware, has any boundary of your property been moved in the last 10 years?

No

If you have answered yes, please give details:

16. Notices that affect your property

In the past 3 years, have you ever received a notice;

a.

advising that the owner of a neighbouring property has made a planning application?

No

b.

that affects your property in some other way?

No

c.

that requires you to do any maintenance, repairs or improvements to your property?

No

Notice:

If you have answered yes to any of **a.-c.** above, please give the notices to your solicitor or estate agent, including any notices which arrive at any time before the date of entry of the purchase of your property.

RESIDENTIAL SINGLE SURVEY TERMS AND CONDITIONS OF ENGAGEMENT



SINGLE SURVEY TERMS AND CONDITIONS

PART 1 – GENERAL

1.1 THE SURVEYORS

The seller has engaged J & E Shepherd to provide the Single Survey Report and a generic Mortgage Valuation Report for Lending Purposes. The seller has also engaged J & E Shepherd to provide an Energy Report in the format prescribed by the accredited Energy Company.

J & E Shepherd are authorised to provide a transcript or retype of the generic Mortgage Valuation Report on to Lender specific forms where requested. For this service a fee may be charged to the prospective purchaser. Transcript reports are commonly requested by Brokers and Lenders. The transcript report will be in the format required by the Lender but will contain the same information, inspection date and valuation figure as the generic Mortgage Valuation Report and the Single Survey.

J & E Shepherd will decline any transcript request which requires the provision of information additional to the information in the report and the generic Mortgage Valuation Report until the Seller has conditionally accepted an offer to purchase, made in writing.

Once the Seller has conditionally accepted an offer to purchase, made in writing, the Purchaser's lender or conveyancer may request that J & E Shepherd provide general comment on standard appropriate supplementary documentation. In the event of a significant amount of documentation being provided to J & E Shepherd, an additional fee may be incurred by the Purchaser.

If information is provided to J & E Shepherd during the conveyancing process which materially affects the valuation stated in the Report and generic Mortgage Valuation Report, J & E Shepherd reserves the right to reconsider the valuation. Where J & E Shepherd requires to amend the valuation in consequence of such information, we will issue an amended Report and generic Mortgage Valuation Report to the Seller. It is the responsibility of the Seller to ensure that the amended Report and generic Mortgage Valuation Report are transmitted to every prospective Purchaser.

The individual Surveyor will be a member of the Royal Institution of Chartered Surveyors who is competent to survey, value and report upon Residential Property. The attending Surveyor will be a member of the RICS Valuer's Registration Scheme and will have the required experience and competency including the skills, understanding and market knowledge to undertake this valuation.

A replacement Home Report (RHR) may also be required, (see S1.10 attached), and these Terms and Conditions, when accepted and returned to J & E Shepherd also relate and are applicable to any RHR where instructed.

If the Surveyor has had previous involvement in the subject property or if a potential conflict of interest exists, this will be notified in writing as an Appendix to these Terms & Conditions.

J & E Shepherd have a written Complaints Handling Procedure (CHP). This CHP document is available from the offices of J & E Shepherd.

1.2 THE REPORT

The Report provided will be a Scottish Single Survey which is a prescribed document as provided by legislation passed by the Scottish Government including the Housing (Scotland) Act 2006 (Prescribed Documents) Regulations 2008.

J & E Shepherd will not provide an amended Report on the Property, except to correct factual inaccuracies.

The report will identify the nature and source of information relied upon in its preparation.

J & E Shepherd shall provide a Market Value of the Property, unless the condition of the Property is such that it would be inappropriate to do so. A final decision on whether a loan will be granted rests with the Lender who may impose retentions in line with their lending criteria. The date of condition and value of the property will be the date of inspection.

A Single Survey is instructed by the Seller and made available to all potential Purchasers in the expectation that the successful Purchaser will have relied upon it. The Royal Institution of Chartered Surveyor rules require disclosure of any potential conflict of interest when acting for the Seller and the Purchaser in the same transaction. The Single Survey may give rise to a conflict of interest and if this is of concern to any party they are advised to seek their own independent advice.

The Report and any expressions or assessments in it are not intended as advice to the Seller or Purchaser or any other person in relation to an asking price or any other sales or marketing decisions.

The Report is based solely on the Property and is not to be relied upon in any manner whatsoever when considering the valuation or condition of any other property.

If certain minor matters are mentioned in the Report it should not be assumed that the Property is free of other minor defects.

Neither the whole nor any part of the report may be published in any way, reproduced or distributed by any party other than the seller, prospective purchasers the Purchaser and their respective professional advisers without the prior written consent of J & E Shepherd.

Information relied upon in the research and preparation of our Report, will be obtained from various sources including information from the Seller including but not restricted to that contained in the Property Questionnaire provided by the Seller, secure and publicly available sales registers, online property information and sales websites and our own records.

1.3 LIABILITY

The Report is prepared with the skill and care reasonably to be expected of a competent residential surveyor who is a member of the Royal Institution of Chartered Surveyors.

The Report shall be prepared in accordance with the RICS Valuation Professional Standards (The Red Book) current version, being the latest published version as at the date of Report. It is confirmed that the valuation will be undertaken in accordance with the International Valuation Standards (IVS). The Firms compliance with these standards may be subject to monitoring under the RICS conduct and disciplinary regulations.

The Report is addressed to the Seller and was prepared in the expectation that it (or a complete copy) along with these Terms and Conditions (or a complete copy) would (or, as the case might be, would have been) be disclosed and delivered to

- the Seller;
- any person(s) noting an interest in purchasing the Property from the Seller;
- any person(s) who make(s) (or on whose behalf is made) an offer to purchase the Property, whether or not that offer is accepted by the Seller;
- the Purchaser; and
- the professional advisers of any of these.

J & E Shepherd acknowledge that their duty of skill and care in relation to the Report is owed to the Seller and to the Purchaser. J & E Shepherd accept no responsibility or liability whatsoever in relation to the Report to persons other than the seller and the Purchaser. The Seller and Purchaser should be aware that if a Lender seeks to rely on this Report they do so at their own risk. In particular, J & E Shepherd accept no responsibility or liability whatsoever to any Lender in relation to the Report. Any such Lender relies upon the report entirely at their own risk.

1.4 GENERIC MORTGAGE VALUATION REPORT

J & E Shepherd undertake to the Seller that they will prepare a generic Mortgage Valuation Report, which will be issued along with the Single Survey. It is the responsibility of the Seller to ensure that the generic Mortgage Valuation Report is provided to every potential Purchaser.

The Seller has the option to exclude the generic Mortgage Valuation Report from being produced.

1.5 TRANSCRIPT MORTGAGE VALUATION FOR LENDING PURPOSES

J & E Shepherd undertake that on being asked to do so by a prospective purchaser, and at an optional minimum charge of £50+vat, or his/her professional advisor or Lender, they will prepare a Transcript Mortgage Valuation Report for Lending Purposes on terms and conditions to be agreed between J & E Shepherd and the Lender and solely for the use of the Lender and upon which the Lender may rely. The decision as to whether finance will be provided is entirely a matter for the Lender. The Transcript Mortgage Valuation Report will be prepared from information contained in the Report and the generic Mortgage Valuation Report, which shall be in accordance with the current RICS Valuation Professional Standards (the Red Book) and the RICS International Valuation Standards (IVS).

1.6 INTELLECTUAL PROPERTY

All intellectual property rights whatsoever (including copyright) in and to the Report, excluding the headings and rubrics, are the exclusive property of J & E Shepherd and shall remain their exclusive property unless they assign the same to any other party in writing.

1.7 PAYMENT

J & E Shepherd are entitled to refrain from delivering the Report to anyone until the fee and other charges for it notified to the Seller have been paid. Additional fees will be charged for subsequent inspections and Reports.

1.8 CANCELLATION

The Seller will be entitled to cancel the inspection by notifying the relevant J & E Shepherd office at any time before the day of the inspection.

J & E Shepherd will be entitled not to proceed with the inspection (and will so report promptly to the Seller) if after arriving at the property, the Surveyor concludes that it is of a type of construction of which the surveyor has insufficient specialist knowledge to be able to provide the inspection satisfactorily. J & E Shepherd will also be entitled not to proceed if after arriving at the property, the inspecting surveyor concludes that the property is exempt under Part 3 of The Housing (Scotland) Act 2006 as detailed in the (Prescribed Documents) Regulations 2008. If there is a potential threat to their health or personal safety, the inspection may be postponed or cancelled, at the surveyor's discretion.

In the case of cancellation or the inspection not proceeding, J & E Shepherd will refund any fees paid by the Seller for the inspection and Report, except for expenses reasonably incurred and any fee due in light of the final paragraph of this section.

In the case of cancellation by the Seller, for whatever reason, after the inspection has taken place but before a written report is issued, J & E Shepherd will be entitled to raise an Invoice equivalent to 80% of the agreed fee.

1.9 PRECEDENCE

If there is any incompatibility between these Terms and Conditions and the Report, these Terms and Conditions take precedence.

1.10 DEFINITIONS

- The "Lender" is the party who has provided or intends or proposes to provide financial assistance to the Purchaser towards the purchase of the Property and in whose favour a standard security will be granted over the Property;
- The "Transcript Mortgage Valuation Report for Lending Purposes" means a separate report, prepared by the Surveyor, prepared from information in the Report and the generic Mortgage Valuation Report, but in a style and format required by the Lender. The Transcript Mortgage Valuation Report for Lending Purposes will be prepared with the skill and care reasonably to be expected from a surveyor who is a member of the Royal Institution of Chartered Surveyors and who is competent to survey, value and report on the Property;
- The "Generic Mortgage Valuation Report" means a separate report, prepared by J & E Shepherd from information in the Report but in the Surveyor's own format;
- "Replacement Home Report" (RHR) relates to a reinspection of the property to prepare a new full Single Survey in order to replace the previous out of date Home Report, normally required after the original Home Report dates 91 days or older;
- The "Market Value" is the estimated amount for which an asset or liability should exchange on the valuation date between a willing Buyer and a willing Seller in an arm's length transaction after proper marketing wherein the parties had each acted knowledgeably, prudently and without compulsion;
- The "Property" is the property which forms the subject of the Report;
- The "Purchaser" is the person (or persons) who enters into a contract to buy the Property from the Seller;
- A "prospective Purchaser" is anyone considering buying the property;

- The "Report" is the report, of the kind described in Part 2 of these Terms and Conditions and in the form set out in Part 1 of Schedule 1 of The Housing (Scotland) Act 2006 (Prescribed Documents) Regulations 2008;
- The "Seller" is/are the proprietor(s) of the Property;
- The "Surveyor" is the author of the report on the Property. The inspection and valuation will be carried out by a Surveyor from J & E Shepherd who will also be a member of the RICS and accredited by the Valuer's Registration Scheme (VRS). Any previous involvement by this Surveyor in the property or potential conflicts of interest will be disclosed as per Section 1.1 above;
- The "Surveyors/J & E Shepherd" are the firm or company of whom the Surveyor is an employee, director, member or partner (unless the Surveyor is not an employee, director, member or partner, when the "Surveyors" means the Surveyor) whose details are set out at the head of the report;
- The "Energy Report" is the advice given by the accredited Energy Company, based on information collected by the Surveyor during the Inspection, and also includes an Energy Performance Certificate, in a Government approved format;

PART 2 – DESCRIPTION OF THE REPORT

2.1 THE SERVICE

The Single Survey is a Report by an independent Surveyor, prepared in an objective way regarding the condition and value of the Property on the day of the inspection, and who is a member of the Royal Institution of Chartered Surveyors. It includes an Energy Report as required by Statute and this is in the format of the accredited Energy Company. In addition, J & E Shepherd has agreed to supply a generic Mortgage Valuation Report.

2.2 THE INSPECTION

The Inspection is a general surface examination of those parts of the Property which are accessible: in other words, visible and readily available for examination from ground and floor levels, without risk of causing damage to the Property or injury to the surveyor.

All references to visual inspection refer to an inspection from within the property at floor level and from ground level within the site and adjoining public areas, without the need to move any obstructions. Any references to left or right are taken facing the front of the property.

Sloping roofs are visually inspected with the aid of binoculars where appropriate. Roof spaces are visually inspected and entered where there is safe and reasonable access, normally defined as being from a 3m ladder within the property. If this is not possible, then physical access to the roof space may be taken by other means if the surveyor deems it safe and reasonable to do so.

Surfaces of exposed floors are visually inspected. No carpets or floor coverings are lifted. Sub-floor areas are inspected only to the extent visible from a readily accessible and unfixed hatch by way of an inverted "head and shoulders" inspection at the access point. Physical access to the sub floor area may be taken if the surveyor deems it is safe and reasonable to do so, and subject to a minimum clearance of 1m between the underside of floor joists and the solum as determined from the access hatch.

The Inspection is carried out with the Seller's permission, without causing damage to the building or contents. Furniture, stored items and insulation are not moved.

Unless identified in the report the surveyor will assume that no harmful or hazardous materials have been used in the construction. The presence or possible consequences of any site contamination will not be researched.

The surveyor will not carry out an asbestos inspection and will not be acting as an asbestos inspector in completing a Single Survey of properties that may fall within the Control of Asbestos in the Workplace Regulations.

In the case of flats, it will be assumed that there is a duty holder, as defined in the Regulations and that a Register of Asbestos and effective Management Plan is in place, which does not require any expenditure, or pose a significant risk to health. No enquiry of the duty holder will be made.

It is assumed that the subject property site and neighbouring areas are free from Japanese Knotweed. Japanese knotweed is an invasive plant that can damage footpaths, driveways, patios and in the worst cases, it can get into the home itself. It is very difficult to get rid of this plant, and removal of this plant can take a number of years, be costly and may affect future saleability and mortgagability of an affected home. Japanese Knotweed is a seasonal growth plant and is almost invisible during the winter months and during its non-growth phase.

2.3 THE REPORT

The Report will be prepared by the surveyor who carried out the property inspection and will describe various aspects of the property as defined by the headings of the Single Survey report with the comments being general and unbiased. The report on the location, style and condition of the property, will be concise and will be restricted to matters that could have a material effect upon value and will omit items that, in the surveyor's opinion, are not significant. If certain minor matters are mentioned, it should not be interpreted that the property is free of any other minor defects.

Throughout the report, the following repair categories will be used to give an overall opinion of the state of repair and condition of the property.

2.3.1 Category 3: Urgent repairs or replacement are needed now. Failure to deal with them may cause problems to other parts of the property or cause a safety hazard. Estimates for repairs or replacement are needed now.

2.3.2 Category 2: Repairs or replacement requiring future attention, but estimates are still advised.

2.3.3 Category 1: No immediate action or repair is needed.

WARNING: If left unattended, even for a relatively short period, Category 2 repairs can rapidly develop into more serious Category 3 repairs. The existence of Category 2 or Category 3 repairs may have an adverse effect on marketability, value and the sale price ultimately achieved for the property. This is particularly true during slow market conditions when the effect can be considerable.

Parts of the property, which cannot be seen or accessed, will not be reported upon and this will be stated. If the surveyor suspects that a defect may exist within an unexposed area and which could have a material effect upon the value, he may recommend further investigation by specialist contractors.

Where defects or repairs have been identified within the report it is essential that, prior to entering into any legally binding sale or purchase contract, further specialists or contractor's advice and estimates should be obtained, to establish the implications, if any, on a potential offer to purchase or the sale price likely to be achieved for the property.

2.4 SERVICES

Our surveyors are not equipped or qualified to test the services and therefore no comment can be interpreted as implying that the design, installation and function of the services are in accordance/compliance with regulations, safety and efficiency expectations. However, comment is made where there is cause to suspect significant defects or shortcomings with the installations. No tests are made of any services or appliances.

2.5 ACCESSIBILITY

A section is included to help identify the basic information interested parties need to know to decide whether to view a property.

2.6 ENERGY REPORT

A section is included that makes provision for an Energy Report, relative to the property. The surveyor will collect physical data from the property and provide such data in a format required by an accredited Energy Company. J & E Shepherd cannot of course accept liability for any advice given by the Energy Company.

2.7 VALUATION AND CONVEYANCER ISSUES

The last section of the Report contains matters considered relevant to the Conveyancer (Solicitor). It also contains J & E Shepherd's opinion both of the market value of the property and of the re-instatement cost, as defined below.

"Market Value" The estimated amount for which an asset or liability should exchange on the valuation date between a willing buyer and a willing seller in an arm's-length transaction, after proper marketing wherein the parties had each acted knowledgeably, prudently and without compulsion. In arriving at the opinion of the Market Value the Surveyor also makes various standard assumptions covering, for example, vacant possession; tenure and other legal considerations; contamination and hazardous materials; the condition of un-inspected parts; the right to use mains services; and the exclusion of curtains, carpets etc. from the valuation. In the case of flats, the following further assumptions are made that:

- There are rights of access and exit over all communal roadways, corridors, stairways etc. and to use communal grounds, parking areas, and other facilities;
- There are no particularly troublesome or unusual legal restrictions;
- There is no current dispute between the occupiers of the flats or any outstanding claims or losses; and the costs of repairs to the building are shared among the co-proprietors on an equitable basis.

Any additional assumption, or any found not to apply, is reported.

"Re-instatement cost" is an estimate for insurance purposes of the current cost of rebuilding the Property in its present form unless otherwise stated. This includes the cost of rebuilding the garage and permanent outbuildings, site clearance and professional fees but excludes VAT (except on the fees).

Sellers or prospective Purchasers may consider it prudent to instruct a re-inspection and revaluation after a period of 12 weeks (or sooner if appropriate) to reflect changing circumstances in the market and/or in the physical condition of the Property.

Unless stated otherwise within this report and in the absence of any information to the contrary, we have assumed that:

- All buildings have been erected either prior to planning control, or in accordance with planning permissions, and have the benefit of permanent planning consents or existing use rights for their current use;
- The property is not adversely affected by town planning or road proposals;
- All alterations, additions or extensions to the property have received all necessary Town Planning Consents, Building Authority Approvals (Building Warrants) and Completion Certificates;
- The property complies with all relevant statutory and local authority requirements, including but not limited to Fire Regulations, The Equality Act, The Control of Asbestos Act, Health and Safety Regulations, Environmental Health Regulations, Regulations governing Residential Tenancies and similar.



North

Inverness	01463 712 239
Elgin	01343 553 939
Fraserburgh	01346 517 456
Peterhead	01779 470 766
Aberdeen	01224 202 800

Tayside

Montrose	01674 676 768
Dundee	01382 200 454
Perth	01738 638 188

Fife

St Andrews	01334 477 773
Kirkcaldy	01592 205 442
Dunfermline	01382 722 337

Lothians/Borders

Edinburgh	01312 251 234
Musselburgh	01316 533 456
Livingston	01506 416 777
Galashiels	01896 750 150
Dalkeith	0131 663 2780

Central

Stirling	01786 450 438
Falkirk	01324 635 999
Cumbernauld	01236 780 000

Lanarkshire

Coatbridge	01236 436 561
Hamilton	01698 897 548
Motherwell	01698 252 229
East Kilbride	01355 248 535

Glasgow/West

Glasgow	0141 353 2080
Glasgow South	0141 649 8020
Greenock	01475 730 717
Paisley	0141 889 8334
Dumbarton	01389 731 682
Hillington	0141 5856373

Ayr/Dumfries

Ayr	01292 267 987
Kilmarnock	01563 520 318
Saltcoats	01294 464 228
Dumfries	01387 264 333

